BenQ MX808STH Short Throw Education Projector

3600 ANSI Lumens, Contrast Ratio: 22,000:1, Throw Ratio: 0.61, 10W Speaker, Anti-Dust Sensor





















Editiens	0.61 Short Throw Education & IWB	Extra Long Source			
Category	Spec Attribute	MX808STH			
Display	Projection System	DLP Single 0.55" XGA			
	DMD Type	DC3 DMD Chip			
	Resolution	1024 x 768 pixels			
	Brightness	3,600 ANSI Lumens			
	Contrast Ratio	22,000:1			
	Display Color	1.07 Billion Colors			
	Aspect Ratio	Native 4:3 (5 aspect ratio selectable)			
	Light Source	Lamp (200W)			
	Light Source Life*	6000/10000/10000/15000 hours			
	•	(Normal/Eco/SmartEco mode/Lampsave)			
	Throw Ratio	0.61			
	Zoom Ratio	Fixed			
	Lens	F/#=2.6, f=6.9mm			
Optical	Keystone Correction	ID, Vertical ± 30 degrees			
Ориса	Lens Control	Manual Focus			
	Projection Offset**	115%+-2.5% (Full-Height)			
	Projection Size (Diagonal)	60"~ 20"			
Audio	Built-in Speaker	IOW RMS			
Security	Socurity Lock	Kensington Lock			
Security	Security Lock	Security Bar			
		HDMI x2			
		PC In (D-sub 15pin) ×2			
		Monitor Out (D-sub 15pin) x1			
		Audio In (mini jack) x2			
Connectivity	NO.D.	Audio Out (mini jack) ×I			
Connectivity	I/O Port	RS232 (DB-9pin) × I			
		USB (type A) ×1 (power only 5V/1.5A)			
		USB (type mini B) ×I			
		IR Receiver x2 (front, top)			
	Resolution Support	VGA(640 × 480) to WUXGA_RB			
		(1920 × 1200) *RB-Reduced Blanking			
Compatibility	Horizontal Frequency	15K~102KHz			
	Vertical Scan Rate	23Hz ~ I 20Hz			
Power	Power Consumption (Max/Normal/Eco)	Typical 260W			
	Standby Power Consumption	Standby<0.5W			
	Power Supply	AC100V to 240V, 50Hz to 60Hz			
Dimension and Weight	Product Dimensions (WxHxD)	296*120*239 mm			
	Product Weight	2.6 Kg			
Operation Condition	Noise Level (Normal/Eco)	34/29dBA			
	Operating Temperature	0° ~ 40° C			
		Remote Control w/ Battery RCE013 x I			
	Accessories (Standard)	Power Cord (by region) x I			
		Quick Start Guide x I			
		Warranty Card (by region) x I			
A	Accessories (Optional)	Spare Lamp Kit 5J.JMG05.001			
Accessories		Dust Filter 5J.JGV I 4.00 I			
		3D Glasses DGD5 5J,J9H25.002			
		PointWrite Kit PW02 5J.J9A26.12E			
		PointWrite Touch Module PT12 5J.J8L26.13E			
		Wall Mount 5J.J4R10.011			
OSD	On Screen Display Language	On Screen Display Language 30 languages			
Environmental Notice	Lamp in this product contains mercury. To dispose of the product or used lamps, consult your local environment authorities for regulations or see www.lamprecycle.org.				


^{*}Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.
**Offset is calculated by full screen height.

Distance Chart


• The screen aspect ratio is 4:3 and the projected picture is in a 4:3 aspect ratio

Screen size				D: 4	Lowest/
Diagonal		H (mm)	W (mm)	Distance from screen (mm)	Highest Lens
Inch	mm	H (IIIII)	** (IIIII)	()	position (mm)
60	1524	914	1219	738	137
70	1778	1067	1422	862	160
80	2032	1219	1626	985	183
90	2286	1372	1829	1108	206
100	2540	1524	2032	1231	229
110	2794	1676	2235	1354	251
120	3048	1829	2438	1477	274

Ceiling / Wall Mount Chart

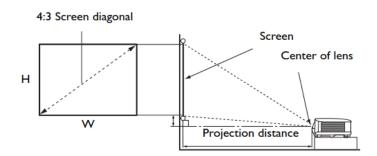

Dimensions

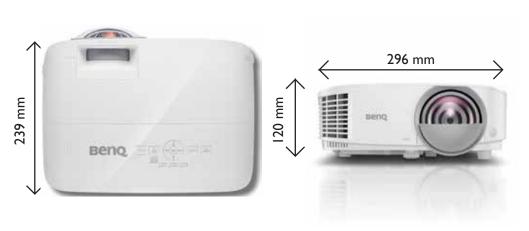



Corporate Office: BenQ India Pvt. Ltd.

9B Building, IIIrd Floor, DLF Cyber City, DLF Phase III, Gurgaon Haryana, India - 122002, Tel: +91 124-4501400, Fax: +91 124-4501400

www.BenQ.in, Customer Care No. 1800-419-9979, E-mail: Sales.EnquiryIn@BenQ.com



2 Years Onsite Warranty for Projector. Lamp Warranty of I year or 1000 Hrs whichever is earlier











