

PATH TO THE FUTURE


The MSI MAG 272QP QD-OLED X50 Gaming Monitor, 27 inches of stunning QD-OLED, 2560 x 1440 (WQHD) and 500Hz for ultra-smooth visuals. Perfect for competitive gamers seeking immersion.



Picture and logos

SELLING POINTS

- Panel MSI QD-OLED – zachwycająca jakość obrazu i krótki czas reakcji.
- Wyjątkowo krótki, 0,03-milisekundowy czas reakcji GtG matrycy i 240-hercowa częstotliwość odświeżania.
- Technologia QD Premium Color – technologia ta sprawia, że współczynnik różnicy wartości koloru dla odwzorowania wyświetlanych na ekranie barw jest mniejszy od dwóch – Delta E ≤ 2.
- Krystalicznie czysty ruch – certyfikat VESA ClearMR 13000.
- MSI OLED Care 2.0 – zmniejszone ryzyko utrwalenia się obrazu / wypalania się matrycy OLED.
- Tryb konsoli, Console Mode – Zoptymalizowany pod kątem bezproblemowej kompatybilności z konsolami do gier, takimi jak PS5 i Xbox z serii X|S.
- 3-letnia gwarancja obejmująca wypalenie, w tym gwarancja obejmująca efekt utrwalenia / wypalania się obrazu OLED.

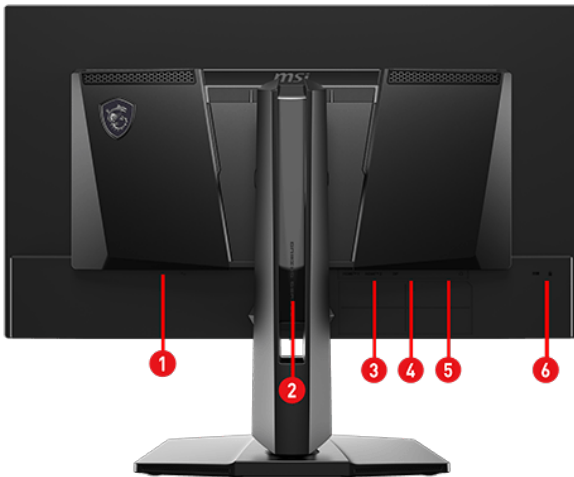

1. AC-in
2. 5-way Joystick Navigator
3. 2 x HDMI™ 2.1 (WQHD@240Hz)
4. DisplayPort 1.4a (HBR3)
5. Headphone out
6. Kensington lock

SPECIFICATION

Model	Part No	9S6-3CFA9T-001
	Color	ID1/Black-Black
Display	Screen Size	26.5" (67.31 cm)
	Active Display Area (mm)	590.42(H) x 333.72(V)
	Curvature	Flat
	Panel Type	QD-OLED
	Resolution	2560x1440 (WQHD)
	Pixel pitch (mm)	0.2292(H)x0.2292(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~240Hz
	SDR Brightness (nits)	200
	HDR Brightness (Peak nits)	400
	Contrast Ratio	1500000:1
	Signal Frequency	384~386.9 KHz(H) / 46.97~241.20 Hz(V)
	Refresh Rate	240HZ
	Response Time (GTG)	0.03ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	121%/95%
	NTSC (CIE1931 area percentage/overlap)	105%/92%
	sRGB (CIE1976 area percentage/overlap)	138%/100%
	sRGB (CIE1931 area percentage/overlap)	148%/100%
	Adobe RGB (CIE1976 area percentage/overlap)	119%/98%
	Adobe RGB (CIE1931 area percentage/overlap)	109%/95%
	DCI-P3 (CIE1976 area percentage/overlap)	110%/99%
	DCI-P3 (CIE1931 area percentage/overlap)	109%/99%
	Rec.709 (CIE1976 area percentage/overlap)	138%/100%
	Rec.709 (CIE1931 area percentage/overlap)	148%/100%
	Rec.2020 (CIE1976 area percentage/overlap)	80%/80%
	Rec.2020 (CIE1931 area percentage/overlap)	78%/78%
	Surface Treatment	Anti-Reflection
	Display Colors	1.07B
Color bit	10 bits	
I/O Ports	Headphone-out	1
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.1 (FRL 10G)
	HDMI HDCP version	2.2
	DisplayPort	1
	DisplayPort version	1.4a (HBR3)
	DisplayPort HDCP version	2.2
Warranty	Warranty	36M
Power	Power Type	Internal Power Board
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	21(SDR), 35(HDR)
	Annual Energy Consumption (KWh)	30.7
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	E (SDR) G (HDR)
	Power Cord Type	C13

Accessories	DisplayPort Cable	1
	HDMI Cable	0
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 110 mm
	Adjustment (Pivot)	-90° ~ 90°
	VESA Mounting	100x100mm
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	609.3 x 241.9 x 427.1
	Product Dimension without Stand (WxDxH) (mm)	609.3 x 67.1 x 356.2
	Stand Dimension (WxDxH) (mm)	308.7 x 241.9 x 390.8
	Weight (Net kg)	6.7
	Weight Without Stand (kg)	3.95
Dimension & Weight (box)	Inside Carton Dimension (WxDxH) (cm)	82 x 16.9 x 51.3
	Outer Carton Dimension (WxDxH) (cm)	83.5 x 18.4 x 53.6
	Weight (Gross kg)	9.4
Barcode Info	EAN	4711377373982