


OVERVIEW

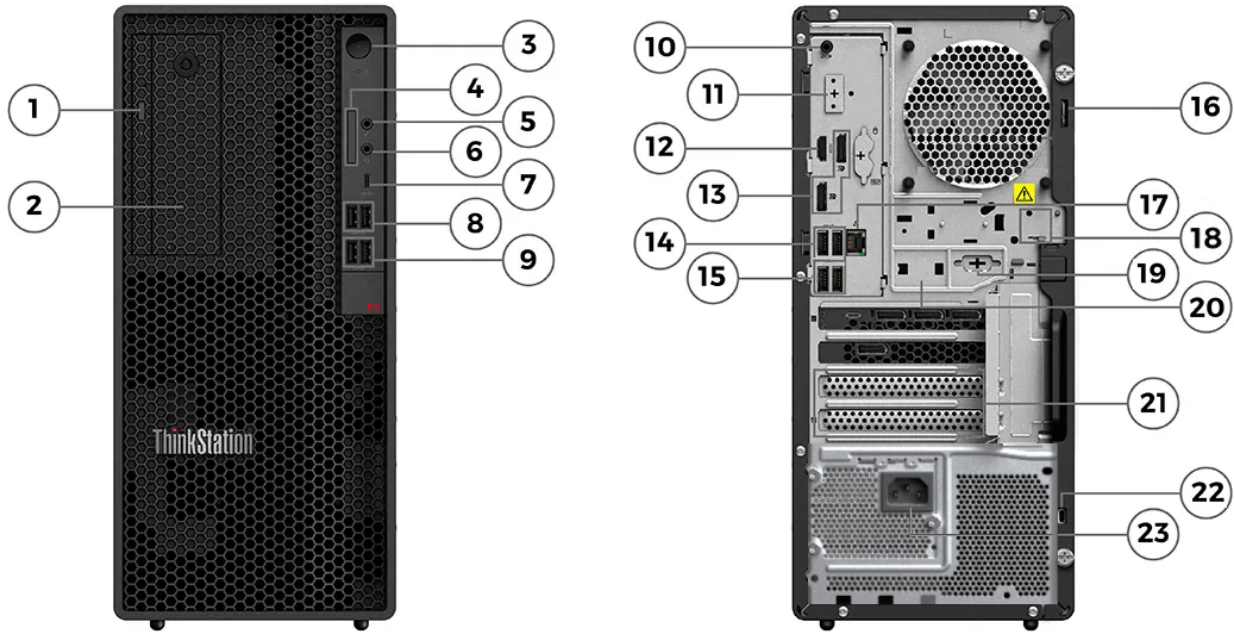

| | |
|--|---|
| 1. Optical drive * | 13. 2x DisplayPort |
| 2. Front access storage bay or 2nd HDD bay * | 14. 2x USB-A (Hi-Speed USB) |
| 3. Power button | 15. 2x USB-A (USB 5Gbps), with Smart Power On |
| 4. SD card reader * | 16. Padlock loop |
| 5. Microphone jack (3.5mm) | 17. Ethernet (GbE RJ-45) |
| 6. Headphone / microphone combo jack (3.5mm) | 18. E-lock slot * |
| 7. USB-C (USB 20Gbps), data transfer only | 19. Serial (9-pin) * |
| 8. 2x USB-A (USB 5Gbps) | 20. Smart cable clip slots |
| 9. 2x USB-A (USB 10Gbps) | 21. Optional ports on expansion cards * |
| 10. Audio line-out (3.5mm) | 22. Kensington Security Slot |
| 11. Flex IO * | 23. Power-in |
| 12. HDMI | |

Notes:

- Items with * are only available on selected models

PERFORMANCE

Processor

Processor Family

Up to one 125W Intel® Core™ Ultra (Series 2) processor; supports up to 24 cores; up to 5.7GHz

Processor**[1]

| Processor Name | Cores | Threads | Base Frequency | Max Frequency | Cache | Memory Support | Processor Graphics | NPU | Intel® vPro® Eligibility | Overall TOPS |
|-------------------|---------------------------|---------|-------------------------------|--|---|----------------|-------------------------------|--------------------------------|--------------------------|---------------|
| Core Ultra 5 225 | 10 (6 P-core + 4 E-core) | 10 | P-core 3.3GHz / E-core 2.7GHz | Max Turbo up to 4.9GHz / P-core 4.9GHz / E-core 4.4GHz | 22MB L2 Cache / 20MB Intel® Smart Cache | DDR5-6400 | Intel® Graphics | - | - | - |
| Core Ultra 5 235 | 14 (6 P-core + 8 E-core) | 14 | P-core 3.4GHz / E-core 2.9GHz | Max Turbo up to 5.0GHz / P-core 5.0GHz / E-core 4.4GHz | 26MB L2 Cache / 24MB Intel® Smart Cache | DDR5-6400 | Intel® Graphics | - | Intel® vPro® Enterprise | - |
| Core Ultra 5 235A | 14 (6 P-core + 8 E-core) | 14 | P-core 3.4GHz / E-core 2.9GHz | P-core 5.0GHz / E-core 4.4GHz | 26MB L2 Cache / 24MB Intel® Smart Cache | DDR5-6400 | Intel® Graphics | - | Intel® vPro® Enterprise | - |
| Core Ultra 5 245 | 14 (6 P-core + 8 E-core) | 14 | P-core 3.5GHz / E-core 3.0GHz | Max Turbo up to 5.1GHz / P-core 5.1GHz / E-core 4.5GHz | 26MB L2 Cache / 24MB Intel® Smart Cache | DDR5-6400 | Intel® Graphics | - | Intel® vPro® Enterprise | - |
| Core Ultra 5 245K | 14 (6 P-core + 8 E-core) | 14 | P-core 4.2GHz / E-core 3.6GHz | Max Turbo up to 5.2GHz / P-core 5.2GHz / E-core 4.6GHz | 26MB L2 Cache / 24MB Intel® Smart Cache | DDR5-6400 | Intel® Graphics | - | Intel® vPro® Enterprise | - |
| Core Ultra 7 265 | 20 (8 P-core + 12 E-core) | 20 | P-core 2.4GHz / E-core 1.8GHz | Max Turbo up to 5.3GHz / P-core 5.2GHz / E-core 4.6GHz | 36MB L2 Cache / 30MB Intel® Smart Cache | DDR5-6400 | Intel® Graphics | - | Intel® vPro® Enterprise | - |
| Core Ultra 7 265K | 20 (8 P-core + 12 E-core) | 20 | P-core 3.9GHz / E-core 3.3GHz | Max Turbo up to 5.5GHz / P-core 5.4GHz / E-core 4.6GHz | 36MB L2 Cache / 30MB Intel® Smart Cache | DDR5-6400 | Intel® Graphics | - | Intel® vPro® Enterprise | - |
| Core Ultra 9 285 | 24 (8 P-core + 16 E-core) | 24 | P-core 2.5GHz / E-core 1.9GHz | Max Turbo up to 5.6GHz / P-core 5.4GHz / E-core 4.6GHz | 40MB L2 Cache / 36MB Intel® Smart Cache | DDR5-6400 | Intel® Graphics, up to 8 TOPS | Intel® AI Boost, up to 13 TOPS | Intel® vPro® Enterprise | Up to 36 TOPS |
| Core Ultra 9 285K | 24 (8 P-core + 16 E-core) | 24 | P-core 3.7GHz / E-core 3.2GHz | Max Turbo up to 5.7GHz / P-core 5.5GHz / | 40MB L2 Cache / 36MB | DDR5-6400 | Intel® Graphics | - | Intel® vPro® Enterprise | - |

| | | | | | | | | | | |
|--|-------|--|--|---------------|--------------------|--|--|--|--|--|
| | core) | | | E-core 4.6GHz | Intel® Smart Cache | | | | | |
|--|-------|--|--|---------------|--------------------|--|--|--|--|--|

Processor Sockets

1x FCLGA1851

Notes:

[1] Intel® Max Turbo frequency will vary depending on application workload and the hardware and software configurations, see <http://www.intel.com/technology/turboboost/> for more information.

AI (Artificial Intelligence)

AI PC Category^[1]

AI-Ready Workstations

Notes:

[1] With scalable configurations of higher-performance CPUs and professional NVIDIA® RTX GPUs, in addition to advantage of the same modern AI PC technology, AI-Ready workstation power the demanding AI consumption & development workflows.

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Ubuntu Linux LTS
- Red Hat Enterprise Linux 10 (certified only, for detailed and latest information, please visit [Red Hat Certified Hardware](#))
- No preload operating system

Graphics

Integrated Graphics

Intel® Graphics

Discrete Graphics Support^[1]

- Supports up to two NVIDIA® RTX 2000 Ada Generation
- Supports up to two NVIDIA® RTX PRO 2000 Blackwell

Discrete Graphics Offering***

| Graphics | Memory | Power | Connector | Form Factor | SLI / NVLink |
|---------------------------------|---------------------|-------|----------------|-------------|--------------|
| NVIDIA® RTX PRO 2000 Blackwell | 16GB GDDR7 with ECC | 70W | 4x miniDP 2.1 | Dual slot | - |
| NVIDIA® RTX 4000 Ada Generation | 20GB GDDR6 with ECC | 130W | 4x DP 1.4a | Single slot | - |
| NVIDIA® RTX 2000 Ada Generation | 16GB GDDR6 with ECC | 70W | 4x miniDP 1.4a | Dual slot | None |
| NVIDIA® RTX A1000 | 8GB GDDR6 | 50W | 4x miniDP 1.4a | Single slot | None |
| NVIDIA® RTX A400 | 4GB GDDR6 | 50W | 4x miniDP 1.4a | Single slot | None |

Notes:

[1] Blackwell GPUs are already supported, and the exact orderability timeframe is under confirmation and may be slightly later.

Monitor Support

Monitor Support

Supports up to 12 independent displays:

- 3 by onboard ports: 2x DP, 1x HDMI®, standard
- 1 by Flex IO port: one of DP / HDMI® / USB-C® / VGA, optional
- 8 by two discrete graphics, optional

Chipset

Chipset

Intel® W880 chipset

Memory

Max Memory^[1]

Up to 128GB (4x 32GB DDR5 UDIMM)

Memory Type^[2]

DDR5-5600 UDIMM, ECC or non-ECC, maximum transfer speeds of up to 5600 MT/s

Memory Slots

Four DDR5 UDIMM slots, dual-channel capable

Memory Protection

ECC on models with ECC DIMMs

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

[2] System comes with DDR5-5600 UDIMM memory and will run at lower speed due to platform limitations:
1x 8GB / 2x 8GB / 1x 16GB / 2x 16GB / 1x 32GB / 2x 32GB configurations run at 5600 MT/s;
4x 8GB / 4x 16GB configurations run at 4800 MT/s;
4x 32GB configuration run at 4400 MT/s.

Storage

Max Storage Support^{[1][2]}

Up to 2x 3.5" SATA HDD; also supports up to 4x M.2 SSD (3 by onboard, 1 by M.2 to PCIe® adapter)

- 3.5" HDD up to 4TB each
- Onboard M.2 SSD up to 4TB each
- M.2 SSD by M.2 to PCIe® adapter up to 4TB^[3]

Storage Type^{*}**

| Disk Type | Interface | RPM | Offering | Security |
|---|---------------------|------|--|----------|
| 3.5" SATA HDD for disk bays and front access bay ^[4] | SATA 6Gb/s | 7.2K | 2TB / 4TB / 6TB | - |
| M.2 SSD for 1x M.2 PCIe® 3.0 slot (by Single M.2 to PCIe® Adapter) ^[5] | NVMe®, PCIe® 4.0 x4 | - | Gen 4 Performance SSD: 512GB / 1TB / 2TB / 4TB Gen 4 SSD: 256GB | Opal 2.0 |
| M.2 SSD for 1x onboard M.2 PCIe® 5.0 slot ^[6] | NVMe®, PCIe® 4.0 x4 | - | Gen 4 Performance SSD: 512GB / 1TB / 2TB / 4TB Gen 4 SSD: 256GB | Opal 2.0 |
| M.2 SSD for 2x onboard M.2 PCIe® 4.0 slots | NVMe®, PCIe® 4.0 x4 | - | Gen 4 Performance SSD: 512GB / 1TB / 2TB / 4TB Gen 4 SSD: 256GB | Opal 2.0 |

Storage Controllers

| Storage Controller | Type | Interface | RAID | Cache |
|-----------------------------|----------|--------------|-------|-------|
| Integrated SATA controller | Standard | SATA 6.0Gb/s | 0/1 | None |
| Integrated NVMe® controller | Standard | PCIe® NVMe® | 0/1/5 | None |

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

[2] For certain post-manufacturing storage upgrades, additional upgrade kits may be required.

[3] In addition to 2x 3.5" bays, an optional 2.5" bay is supported. 2.5" drive is for customer-own configuration. None of configurable 2.5" drive options are provided.

[4] 6TB 3.5" HDD is for special bids only.

[5] M.2 slot supports PCIe® 3.0, Gen 4 SSDs will run on PCIe® 3.0.

[6] M.2 slot supports PCIe® 5.0, currently optional M.2 SSD support PCIe® 4.0.

Removable Storage

Optical Support

Optional one 9.0mm optical drive, DVD-ROM, DVD±RW, and Blu-ray

Card Reader

- SD card reader
- No card reader

Multi-Media**Audio Chip**

High Definition (HD) Audio, Realtek® ALC623-CG codec

Speakers

Single speaker, 2W x1

Power Supply**Power Supply****

| Power | Type | Efficiency | Key Features |
|-------|-------|------------|---|
| 500W | Fixed | 92% | Autosensing, 80 PLUS Platinum qualified |
| 750W | Fixed | 92% | Autosensing, 80 PLUS Platinum qualified |

DESIGN**Mechanical^[1]****Form Factor**

Tower (17L)

Dimensions (WxDxH)^[2]

170 x 315.35 x 376 mm (6.7 x 12.4 x 14.8 inches, with feet)

Weight^[3]

9.67 kg (21.32 lbs, maximum configuration)

Bays

Three internal disk bays, up to two 3.5" bays plus one 2.5" bay:

- Bay 1 supports one 3.5" HDD, standard; or one 2.5" HDD / SSD, optional
- Bay 2 supports one 3.5" HDD or 2.5" HDD / SSD, optional
- Bay 3 supports one 2.5" HDD / SSD, optional
- Front Access HDD Bay supports one 3.5" HDD or 2.5" HDD / SSD, optional, occupies Bay 2 location^[4]

M.2 Slots

- One M.2 slot (for WLAN)
- Up to 4x M.2 slots for M.2 SSD:
 - 2 onboard M.2 PCIe® 4.0 slots
 - 1 onboard M.2 PCIe® 5.0 slot
 - 1 via Single M.2 to PCIe® adapter, running on PCIe® 3.0 protocol^[5]

Expansion Slots

Supports four PCIe® slots with one PCIe® 5.0 x16, one PCIe® 4.0 x16, and two PCIe® 3.0 x1.

- Slot 1: PCIe® 5.0 x16, full height, length <= 268mm, 75W, double-width
- Slot 2: PCIe® 3.0 x1, full height, half length, 25W, open-ended
- Slot 3: PCIe® 4.0 x16 (x4 lanes), full height, half length, 25W
- Slot 4: PCIe® 3.0 x1, full height, half length, 25W, open-ended

EOU

Tool-less design for side cover, memory, 3.5" HDD, optical, PCIe® card assembly / removal

Notes:

[1] The actual data transfer rate of the following PCIe® interface also depends on the capabilities of the connected PCIe® device. The listed values represent theoretical maximums.

PCIe® 3.0 (x1 / x2 / x4 / x8 / x16): 1 GB/s (8 Gbps) / 2 GB/s (16 Gbps) / 4 GB/s (32 Gbps) / 8 GB/s (64 Gbps) / 16 GB/s (128 Gbps);

PCIe® 4.0 (x1 / x2 / x4 / x8 / x16): 2 GB/s (16 Gbps) / 4 GB/s (32 Gbps) / 8 GB/s (64 Gbps) / 16 GB/s (128 Gbps) / 32 GB/s (256 Gbps);

PCIe® 5.0 (x1 / x2 / x4 / x8 / x16): 4 GB/s (32 Gbps) / 8 GB/s (64 Gbps) / 16 GB/s (128 Gbps) / 32 GB/s (256 Gbps) / 64 GB/s (512 Gbps).

[2] The system dimensions may vary depending on configurations.

[3] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

[4] 3.5" bay and Front Access HDD Bay need optional 3.5" to 2.5" HDD bracket kit to support 2.5" drive. 2.5" drive is for customer-own configuration. None of configurable 2.5" drive options are provided.

[5] M.2 slot is PCIe® 5.0 compatible, and currently M.2 PCIe® 4.0 SSD is offered.

CONNECTIVITY

Network

WLAN + Bluetooth^[1]

- Intel® Wi-Fi® 7 BE200, 802.11be 2x2 Wi-Fi® + Bluetooth® 5.4, Intel® vPro® technology support
- No WLAN and Bluetooth®

Onboard Ethernet

Gigabit Ethernet, Intel® Ethernet Connection I219-LM, 1x RJ-45, supports Wake-on-LAN

Optional Ethernet

Up to two additional PCIe® x1 Ethernet adapters; or one PCIe® x4 plus one PCIe® x1 Ethernet adapter, up to five additional GbE ports

- Gigabit Ethernet, Intel® I210-T1, 1x RJ-45, PCIe® x1
- Gigabit Ethernet, Intel® I350-T4, 4x RJ-45, PCIe® x4
- 2.5 Gigabit Ethernet, Realtek® RTL8125BGS, 1x RJ-45, PCIe® x1

Notes:

[1] Wi-Fi® operation (including Wi-Fi® 6, Wi-Fi® 6E, Wi-Fi® 7, etc.) is subject to the regulatory requirements of each country. Bluetooth® may operate at a lower version than hardware design depending on the factors such as operating system, driver, etc.

Ports^[1]

Front Ports

- 1x USB-C® (USB 20Gbps / USB 3.2 Gen 2x2), data transfer only
- 2x USB-A (USB 5Gbps / USB 3.2 Gen 1)
- 2x USB-A (USB 10Gbps / USB 3.2 Gen 2)
- 1x headphone / microphone combo jack (3.5mm)
- 1x microphone (3.5mm)

Optional Front Ports

1x SD card reader

Rear Ports

- 2x USB-A (Hi-Speed USB / USB 2.0)
- 2x USB-A (USB 5Gbps / USB 3.2 Gen 1), one supports Smart Power On
- 1x HDMI® 2.1 TMDS
- 2x DisplayPort™ 1.4
- 1x Ethernet (GbE RJ-45)
- 1x line-out (3.5mm)

Optional Rear Ports

- 1x USB-C® (USB 5Gbps / USB 3.2 Gen 1), with DisplayPort™ function (Flex IO)
- 1x HDMI® 2.1 TMDS (Flex IO)
- 1x DP 1.2 (Flex IO)
- 1x VGA (Flex IO)
- 1x parallel (via cable and PCIe® bracket)
- 1x USB-C® (USB 20Gbps / USB 3.2 Gen 2x2), support data transfer, via PCIe® x4 card
- 2x USB-A (Hi-Speed USB / USB 2.0), via cable and PCIe® bracket
- 2x USB-A (USB 5Gbps / USB 3.2 Gen 1), via additional PCIe® x1 adapter
- 1x serial (via cable)
- 4x serial (via 4-port serial expansion card, PCIe® x1)

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

Thunderbolt™ 5: 80 Gbit/s (bidirectional), up to 120 Gbit/s in bandwidth boost mode for video-intensive applications.

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

Physical Locks

- (Optional) E-lock
- Kensington® Security Slot™, 3 x 7 mm
- Padlock Loop

Chassis Intrusion Switch

- Chassis intrusion switch
- No chassis intrusion switch

BIOS Security

- Administrator password
- Power-on password
- Self-healing BIOS
- More BIOS security features, please visit [BIOS Simulator](#)

MANAGEABILITY

System Management

System Management^{[1][2]}

- (Optional) Intel® vPro® Enterprise with Intel® AMT 16
- Non-vPro®

Notes:

[1] Intel® vPro® offers a superset of DASH's defined capabilities.

[2] Intel® vPro® platform require an eligible Intel® processor, a supported operating system, Intel® LAN and/or WLAN silicon, firmware enhancements, and other hardware and software necessary to deliver the manageability use cases, security features, system performance, and stability that define the platform. See [Intel® vPro® Platform](#) for details.

SERVICE

Warranty^[1]

Base Warranty**

- 1-year limited onsite service
- 2-year limited onsite service
- 3-year limited onsite service
- No base warranty

Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://support.lenovo.com/warrantylookup/warrantypolicy>.

OPERATING REQUIREMENTS

Operating Environment

Temperature

- Operating: 10°C (50°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

Relative Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

ENVIRONMENTAL

Sustainability

Material^[1]

- 85% PCC ABS bezel
- 95% PCC ABS wired USB keyboard/mouse top/bottom cover
- 90% PIC recycled plastic EPE cushion
- 30% OBP used in bag
- FSC certified paper in packaging

Notes:

[1] PCC: Post Consumer Content, recycled materials from customers.
PIC: Post Industry Content, recycled materials from internal factories.
EPE: Expanded Polyethylene.
OBP: Ocean Bound Plastic, reducing plastic spill into the sea.
FSC: Forest Stewardship Council.

CERTIFICATIONS

Green Certifications^[1]

Green Certifications

- (Optional) ENERGY STAR® 9.0
- (Optional) EPEAT™ Gold Registered
- RoHS compliant
- TCO Certified, generation 10

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

ISV Certifications

ISV Certifications

Please visit [ISV certifications for Lenovo® Workstations](#)

- Feature with ** means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Feature with *** means that one or more options listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS", WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to

you.

- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

