


**OVERVIEW**

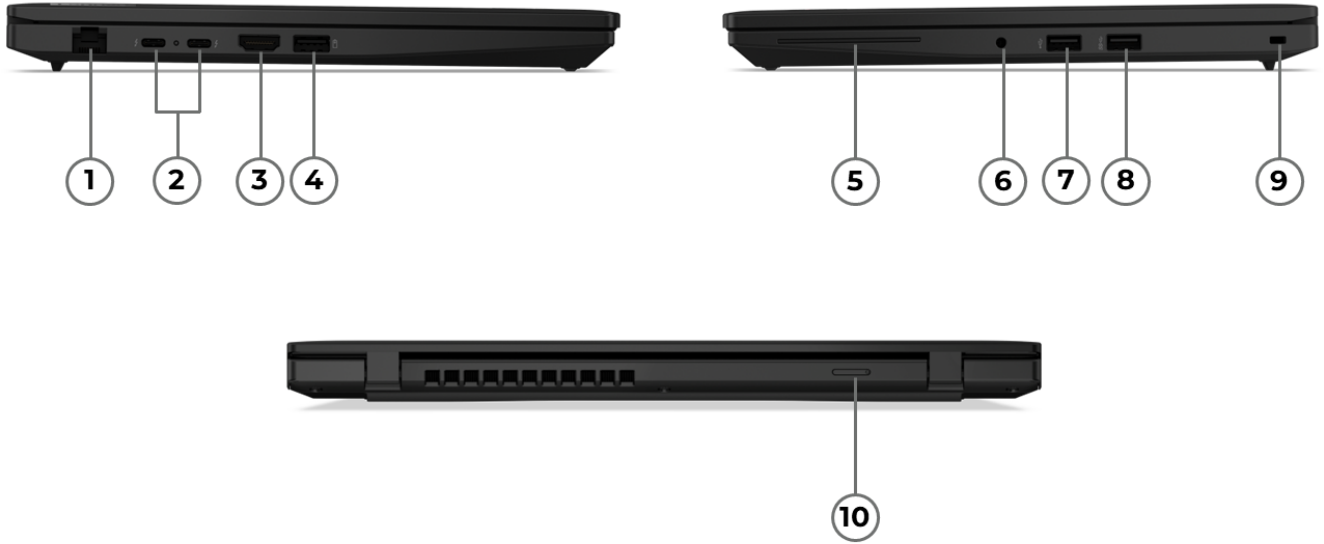

1. Ethernet (RJ-45)	6. Headphone / microphone combo jack (3.5mm)
2. 2x Thunderbolt 4	7. USB-A (Hi-Speed USB)
3. HDMI	8. USB-A (USB 5Gbps)
4. USB-A (USB 5Gbps), Always On	9. Kensington Nano Security Slot
5. Smart card reader *	10. Nano-SIM card slot (WWAN model) *

Notes:

- Items with \* are only available on selected models

## PERFORMANCE

### Processor

#### Processor Family

Intel® U or H Series Core Ultra 5 / 7 Processor (Series 2)

#### Processor\*\*[1]

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics	NPU	Intel® vPro® Eligibility	Overall TOPS
Core Ultra 5 225H	14 (4 P-core + 8 E-core + 2 LP E-core)	14	P-core 1.7GHz / E-core 1.3GHz / LP E-core 700MHz	P-core 4.9GHz / E-core 4.3GHz / LP E-core 2.5GHz	18MB Intel® Smart Cache	Intel® Arc™ 130T GPU, up to 63 TOPS <sup>[2]</sup>	Intel® AI Boost, up to 13 TOPS	-	Up to 83 TOPS
Core Ultra 5 225U	12 (2 P-core + 8 E-core + 2 LP E-core)	14	P-core 1.5GHz / E-core 1.3GHz / LP E-core 700MHz	P-core 4.8GHz / E-core 3.8GHz / LP E-core 2.4GHz	12MB Intel® Smart Cache	Intel® Graphics, up to 8 TOPS	Intel® AI Boost, up to 12 TOPS	-	Up to 24 TOPS
Core Ultra 5 235H	14 (4 P-core + 8 E-core + 2 LP E-core)	14	P-core 2.4GHz / E-core 1.8GHz / LP E-core 700MHz	P-core 5.0GHz / E-core 4.4GHz / LP E-core 2.5GHz	18MB Intel® Smart Cache	Intel® Arc™ 140T GPU, up to 74 TOPS <sup>[3]</sup>	Intel® AI Boost, up to 13 TOPS	Intel® vPro® Enterprise	Up to 94 TOPS
Core Ultra 5 235U	12 (2 P-core + 8 E-core + 2 LP E-core)	14	P-core 2.0GHz / E-core 1.6GHz / LP E-core 700MHz	P-core 4.9GHz / E-core 4.1GHz / LP E-core 2.4GHz	12MB Intel® Smart Cache	Intel® Graphics, up to 8 TOPS	Intel® AI Boost, up to 12 TOPS	Intel® vPro® Enterprise	Up to 24 TOPS
Core Ultra 7 255H	16 (6 P-core + 8 E-core + 2 LP E-core)	16	P-core 2.0GHz / E-core 1.5GHz / LP E-core 700MHz	P-core 5.1GHz / E-core 4.4GHz / LP E-core 2.5GHz	24MB Intel® Smart Cache	Intel® Arc™ 140T GPU, up to 74 TOPS <sup>[4]</sup>	Intel® AI Boost, up to 13 TOPS	-	Up to 96 TOPS
Core Ultra 7 255U	12 (2 P-core + 8 E-core + 2 LP E-core)	14	P-core 2.0GHz / E-core 1.7GHz / LP E-core 700MHz	P-core 5.2GHz / E-core 4.2GHz / LP E-core 2.4GHz	12MB Intel® Smart Cache	Intel® Graphics, up to 8 TOPS	Intel® AI Boost, up to 12 TOPS	-	Up to 24 TOPS
Core Ultra 7 265U	12 (2 P-core + 8 E-core + 2 LP E-core)	14	P-core 2.1GHz / E-core 1.7GHz / LP E-core 700MHz	P-core 5.3GHz / E-core 4.2GHz / LP E-core 2.4GHz	12MB Intel® Smart Cache	Intel® Graphics, up to 8 TOPS	Intel® AI Boost, up to 12 TOPS	Intel® vPro® Enterprise	Up to 24 TOPS

#### Notes:

[1] Intel® Core™ Ultra 5 225H and 235H are for special bid only.

[2], [3], [4] Intel® Arc™ Graphics only available on select H-series Intel® Core™ Ultra processor powered systems with at least 16GB of system memory in a dual-channel configurations, otherwise it will function as Intel® Graphics.

### AI (Artificial Intelligence)

#### AI PC Category

AI PC<sup>[1]</sup>

#### NPU

Integrated Intel® AI Boost, up to 13 TOPS

#### Notes:

[1] AI PCs have a NPU capable of 10+ TOPs to run the Copilot assistant by pressing the optional Microsoft® Copilot key or

using Win + C.

## Operating System

### Operating System\*\*<sup>[1]</sup>

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 IoT Enterprise LTSC 2024
- Windows® 10 IoT Enterprise LTSC 2021
- Ubuntu Linux<sup>[2]</sup>
- Linux<sup>[3]</sup>
- No preload operating system

Notes:

[1] Windows® 11 Pro Education license can be requested for EMEA Education Customers only with limited specs. Any request please contact Lenovo® Sales Representative for more information.

[2], [3] Some features may not be supported on the system with Linux preload, including but not limited to Intel® RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.

## Graphics

### Graphics\*\*

Graphics	Type	Memory	Key Features
Intel® Graphics	Integrated	Shared	DirectX® 12.2
Intel® Arc™ 130T GPU <sup>[1]</sup>	Integrated	Shared	DirectX® 12.2
Intel® Arc™ 140T GPU <sup>[2]</sup>	Integrated	Shared	DirectX® 12.2

Notes:

[1], [2] Intel® Arc™ graphics only available on select H-series Intel® Core™ Ultra processor powered systems with at least 16GB of system memory in a dual-channel configurations, otherwise it will function as Intel® Graphics.

## Monitor Support

### Monitor Support<sup>[1]</sup>

Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and Thunderbolt™)

- HDMI® supports up to 3840x2160@60Hz
- Thunderbolt™ supports up to 7680x4320@60Hz<sup>[2]</sup>

Notes:

[1] Refresh rates >60hz also supported, however max resolution will be limited.

[2] 8K resolution support needs 2 display pipes. That is, simultaneous display number will "-1" when 8K resolution displayed.

## Chipset

### Chipset

Intel® SoC (System on Chip) platform

## Memory

### Max Memory<sup>[1]</sup>

Up to 64GB DDR5-5600

### Memory Slots

Two DDR5 SODIMM slots, dual-channel capable

### Memory Type

DDR5-5600

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

## Storage

### Max Storage Support<sup>[1]</sup>

One drive, up to 2TB M.2 2280 SSD

### Storage Slot<sup>[2]</sup>

One M.2 2280 PCIe® 4.0 x4 slot

### Storage Type\*\*

Disk Type	Interface	Offering	Security
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	256GB / 512GB / 1TB	Opal 2.0
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4 Performance	2TB	Opal 2.0

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

[2] The actual data transfer rate of the following PCIe® interface also depends on the capabilities of the connected PCIe® device. The listed values represent theoretical maximums.

PCIe® 3.0 (x2 / x4): 2 GB/s (16 Gbps) / 4 GB/s (32 Gbps);

PCIe® 4.0 (x2 / x4): 4 GB/s (32 Gbps) / 8 GB/s (64 Gbps);

PCIe® 5.0 (x2 / x4): 8 GB/s (64 Gbps) / 16 GB/s (128 Gbps).

## Removable Storage

### Card Reader

No card reader

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Senary SN6147 codec

### Speakers

Stereo speakers, 2W x2, optimized with Dolby Atmos®

### Microphone

Dual-microphone array, 360° far-field, Elevoc Voice

### Camera\*\*

- 5.0MP + IR discrete, with privacy shutter, fixed focus, temporal noise reduction
- HD 720p, with privacy shutter, fixed focus

## Battery

### Battery\*\*

- 46.5Wh Rechargeable Li-ion Battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter<sup>[1]</sup>
- 57Wh Rechargeable Li-ion Battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter<sup>[2]</sup>

### Battery Life<sup>[3]</sup>

Configuration 1 (max battery life)

MobileMark® 25: up to 15.46 hr with 468 performance score @250nits

JEITA-BAT 3.0 (Video/Idle): up to 15.54 hr / 32.68 hr @200nits

Local video playback: up to 26.09 hr @150nits

Alternate configuration 2

MobileMark® 25: up to 15.18 hr with 608 performance score @250nits

JEITA-BAT 3.0 (Video/Idle): up to 14.76 hr / 29.39 hr @200nits

Local video playback: up to 26.49 hr @150nits

Alternate configuration 3

MobileMark® 25: up to 12.85 hr with 500 performance score @250nits

JEITA-BAT 3.0 (Video/Idle): up to 12.32 hr / 23.45 hr @200nits

Local video playback: up to 24.26 hr @150nits

Notes:

[1], [2] Rapid charge is only guaranteed when the computer is turned off or in standby mode or in hibernation mode.

When the computer is powered on, the Charge Time will vary depending on system power consumption and AC adapter power.

[3] Configuration 1 (max battery life): WUXGA (non-touch), Intel® Core™ Ultra 5 225U, 8GB DDR5, Win 11, 57Wh battery, best power efficiency power mode

Alternate configuration 2: WUXGA (non-touch), Intel® Core™ Ultra 5 225H, 8GB DDR5, Win 11, 57Wh battery, best power efficiency power mode

Alternate configuration 3: WUXGA (touch), Intel® Core™ Ultra 5 235U, 16GB DDR5, Win 11, 57Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using [MobileMark® 25](#), JEITA 3.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level), or Google Power Load Test (PLT) battery-life benchmark tests.

Actual battery life will vary depending on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.

The maximum capacity of the battery will decrease with time, ambient temperature and use.

Refer to [Microsoft® link](#) for more information about the Windows® Performance power slider.

## Power Adapter

### Power Adapter\*\*<sup>[1]</sup>

- 65W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim GaN (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim GaN (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter<sup>[2]</sup>

Notes:

[1] AC adapter offerings depend on the country.

[2] No power adapter is for special bid only.

## DESIGN

### Display

#### Display\*\*

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Refresh Rate	Viewing Angle (L/R/U/D)	Key Features
14"	WUXGA (1920x1200)	Non-touch	IPS <sup>[1]</sup>	400nits	Anti-glare	16:10	1000:1	45% NTSC	60Hz	89° / 89° / 89° / 89°	3M™ DBEF5
14"	WUXGA (1920x1200)	Multi-touch	IPS <sup>[2]</sup>	400nits	Anti-glare	16:10	1000:1	45% NTSC	60Hz	89° / 89° / 89° / 89°	TÜV Low Blue Light, Eyesafe® Certified 2.0, 3M™ DBEF5
14"	WUXGA (1920x1200)	Non-touch	IPS <sup>[3]</sup>	500nits	Anti-glare	16:10	1500:1	100% sRGB	60Hz	89° / 89° / 89° / 89°	Low power, TÜV Low Blue Light, Eyesafe® Certified 2.0

#### Touchscreen

On-cell multi-touch, supports 10-point touch

#### Screen-to-Body Ratio

85.5%

Notes:

[1], [2], [3] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

## Input Device

### Pen

No support

**Keyboard**

6-row, spill-resistant, multimedia Fn keys, key travel 1.5mm / 1.35mm (Fn row & G/H/B), Copilot key

**Keyboard Backlight**

- LED backlight
- Non-backlight

**UltraNav™**

TrackPoint® pointing device, double-tap to open the TrackPoint® Quick Menu  
Mylar® surface multi-touch 3-button Trackpad, 60 x 115 mm (2.36 x 4.53 inches)

**Mechanical****Dimensions (WxDxH)<sup>[1]</sup>**

Models	Dimensions
Models with aluminium (top) and PC-CF (bottom)	313.7 x 226 x 11.32/17.01 (front/rear), 21.5 (maximum) mm; 12.35 x 8.90 x 0.45/0.67 (front/rear), 0.85 (maximum) inches
Models with aluminium (top) and PC-ABS (bottom)	313.7 x 226 x 11.32/17.01 (front/rear), 21.7 (maximum) mm; 12.35 x 8.90 x 0.45/0.67 (front/rear), 0.85 (maximum) inches
Models with PC-ABS (top) and PC-ABS (bottom)	313.7 x 226 x 11.39/17.31 (front/rear), 22.9 (maximum) mm; 12.35 x 8.90 x 0.45/0.68 (front/rear), 0.90 (maximum) inches

**Weight<sup>[2]</sup>**

Starting at 1.38 kg (3.05 lbs)

**Case Color**

Black

**Case Material\*\***

- Aluminium (top), PC-ABS (bottom)
- Aluminium (top), PC-CF (bottom)
- PC-ABS (top), PC-ABS (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

**CONNECTIVITY****Network****WLAN + Bluetooth®\*\*<sup>[1]</sup>**

- Intel® Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3
- Intel® Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3, Intel® vPro® technology support<sup>[2]</sup>
- Intel® Wi-Fi® 7 BE201, 802.11be 2x2 Wi-Fi® + Bluetooth® 5.4
- Intel® Wi-Fi® 7 BE201, 802.11be 2x2 Wi-Fi® + Bluetooth® 5.4, Intel® vPro® technology support<sup>[3]</sup>

**WWAN\*\***

- Wireless WAN upgradable to 4G (with antenna ready)
- Quectel EM061K-GL, 4G LTE CAT6, M.2 card, with embedded eSIM functionality
- Quectel EM160R-GL, 4G LTE CAT16, M.2 card, with embedded eSIM functionality
- No support

**SIM Card\*\***

- KDDI eSIM Program (Japan)<sup>[4]</sup>
- KDDI eSIM Program 3-year (Japan)
- KDDI eSIM Program 3-year with international roaming (Japan)
- KDDI eSIM Program 4-year (Japan)
- KDDI eSIM Program 4-year with international roaming (Japan)
- KDDI eSIM Program 5-year with international roaming (Japan)
- No physical SIM card inbox

**Ethernet**

\*\*

- Gigabit Ethernet, Intel® Ethernet Connection I219-LM (vPro® models), 1x RJ-45, supports Wake-on-LAN
- Gigabit Ethernet, Intel® Ethernet Connection I219-V (non-vPro® models), 1x RJ-45, supports Wake-on-LAN

**NFC**

- Near Field Communication
- No support

---

**Notes:**

[1] Wi-Fi® operation (including Wi-Fi® 6, Wi-Fi® 6E, Wi-Fi® 7, etc.) is subject to the regulatory requirements of each country. Bluetooth® may operate at a lower version than hardware design depending on the factors such as operating system, driver, etc.

[2], [3] Intel® vPro® platform requires the hardware and software necessary to deliver the manageability use cases, security features, system performance, and stability that define the platform. For detailed vPro® support information, please refer to the System Management section.

[4] KDDI eSIM Program has no physical SIM card inbox and is for special bid only.

**Ports<sup>[1]</sup>****Standard Ports**

- 1x USB-A (Hi-Speed USB / USB 2.0)
- 1x USB-A (USB 5Gbps / USB 3.2 Gen 1)
- 1x USB-A (USB 5Gbps / USB 3.2 Gen 1), Always On
- 2x USB-C® (Thunderbolt™ 4 / USB4® 40Gbps), with USB PD 3.1 and DisplayPort™ 2.1
- 1x HDMI® 2.1, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Ethernet (RJ-45)

**Optional Ports<sup>\*\*\*</sup>**

- 1x Nano-SIM card slot (WWAN support models)
- 1x Smart card reader

---

**Notes:**

[1] The transfer speed of the ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

**Docking****Docking**

Various docking solutions supported via Thunderbolt™ or USB-C®.

For more compatible docking solutions, please visit [Docking for ThinkPad® L14 Gen 6 \(Intel®\)](#)

**SECURITY & PRIVACY****Security****ThinkShield**

ThinkShield is a comprehensive security solution that encompasses hardware, software, and supply chain components. For more details, visit [here](#)

**Security Chip**

Discrete TPM 2.0, TCG certified, FIPS 140-3 certified

**Physical Locks**

Kensington® Nano Security Slot™, 2.5 x 6 mm

**Smart Card Reader**

- Smart card reader, supports ISO 7816 and EMV
- No smart card reader

**Fingerprint Reader**

- Touch style fingerprint reader integrated in power button, match-on-chip
- No fingerprint reader

**BIOS Security**

- Certificate-based BIOS authentication
- FIDO (Fast Identity Online) authentication
- NVMe<sup>®</sup> password
- Power-on password
- Supervisor password
- System management password
- Self-healing BIOS
- More BIOS security features, please visit [BIOS Simulator](#)

#### Other Security

- Camera privacy shutter
- (Optional) IR camera for Windows<sup>®</sup> Hello (facial recognition)
- Privacy Guard with Privacy Alert (software solution)

## MANAGEABILITY

### System Management

#### System Management<sup>[1]</sup>

- Intel<sup>®</sup> vPro<sup>®</sup> Enterprise<sup>[2]</sup>
- Non-vPro<sup>®</sup>

Notes:

[1] Intel<sup>®</sup> vPro<sup>®</sup> platform require an eligible Intel<sup>®</sup> processor, a supported operating system, Intel<sup>®</sup> LAN and/or WLAN silicon, firmware enhancements, and other hardware and software necessary to deliver the manageability use cases, security features, system performance, and stability that define the platform. See [Intel<sup>®</sup> vPro<sup>®</sup> Platform](#) for details.

[2] Intel<sup>®</sup> vPro<sup>®</sup> offers a superset of DASH's defined capabilities.

## SERVICE

### Warranty

#### Base Warranty\*\*

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service
- No base warranty

## ACCESSORIES

### Bundled Accessories

#### Bundled Accessories\*\*\*<sup>[1]</sup>

- Lenovo<sup>®</sup> HDMI<sup>®</sup> to VGA Monitor Adapter
- Lenovo<sup>®</sup> USB-C<sup>®</sup> to DisplayPort™ Adapter
- Lenovo<sup>®</sup> USB-C<sup>®</sup> to VGA Adapter
- None

Notes:

[1] For more compatible accessory solutions, please visit [Accessories for ThinkPad<sup>®</sup> L14 Gen 6 \(Intel<sup>®</sup>\)](#).

## OPERATING REQUIREMENTS

### Operating Environment

#### Temperature<sup>[1]</sup>

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping packaging: -20°C (-4°F) to 60°C (140°F)
- Storage without packaging: 5°C (41°F) to 43°C (109°F)

### Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

### Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

#### Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

## ENVIRONMENTAL

### Sustainability

#### Material<sup>[1]</sup>

50% recycled aluminium on top cover  
50% PCC recycled on display cover bezel  
60% PCC recycled on keyboard frame  
Up to 50% PCC recycled on bottom cover  
85% PCC recycled plastic used in key caps (backlight)  
70% PCC recycled plastic used in key caps (non-backlight)  
90% PCC recycled plastic used in speaker enclosure  
90% PCC recycled plastic used in the battery pack enclosure  
90% PCC recycled plastic used in slim GaN 65W adapters and standard 65W adapters  
100% plastic-free primary packaging  
TOTAL PCC: 24-36%

#### Notes:

[1] PCC: Post Consumer Content, recycled materials from customers.

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

#### Green Certifications<sup>[2]</sup>

- ENERGY STAR® 9.0
- EPEAT™ Gold Registered<sup>[3]</sup>
- ErP Lot 6/26
- RoHS compliant
- TCO Certified, generation 10

#### Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] EPEAT™ registration and ENERGY STAR® certification are optional and only available on the models with preloaded OS. Please visit [epeat.net](https://epeat.net) and [energystar.gov](https://energystar.gov) for more information.

[3] EPEAT™ is registered where applicable, please visit [epeat.net](https://epeat.net) for registration status by country.

### Other Certifications

#### Mil-Spec Test

MIL-STD-810H military test passed

#### Other Certifications

- (Optional) Eyesafe® Certified 2.0
- (Optional) TÜV Rheinland® Low Blue Light (Hardware Solution)
- Feature with \*\* means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Feature with \*\*\* means that one or more options listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not

responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS", WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.

- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

