

PATH TO THE FUTURE


Introducing the MSI MAG 274QPF E20 esports gaming monitor. This cutting-edge monitor features a 27-inch WQHD display with a lightning-fast 200Hz refresh rate and a rapid 0.5ms (GtG, Min.) response time. With the MAG 274QPF E20, you will have the competitive advantage needed to outperform and defeat your opponents in gaming battles.



Picture and logos

SELLING POINTS

- Panel Rapid VA - oferuje szybki, 0,5-milisekundowy czas reakcji (GtG, min.) matrycy, optymalizuje kolory i jasność ekranu.
- Częstotliwość odświeżania 200 Hz - reaguj znacznie szybciej dzięki dużo bardziej płynnemu wyświetlaniu klatek obrazu na ekranie monitora.
- 0,5-milisekundowy czas reakcji (GtG, min.) matrycy - zlikwidowany efekt rozdzierania ekranu i wyeliminowana niestabilność szybkości generowania klatek obrazu.
- AI Vision - nowa technologia AI Vision może nie tylko ujawnić szczegóły ukrywające się w ciemnych obszarach ekranu, ale także zwiększyć ogólną jasność i nasycenie kolorów.
- Technologia Less Blue Light - zastosuj software'owe rozwiązanie, które zmniejszy emisję niebiesko-fioletowego światła w obszarze niebieskiego widma.

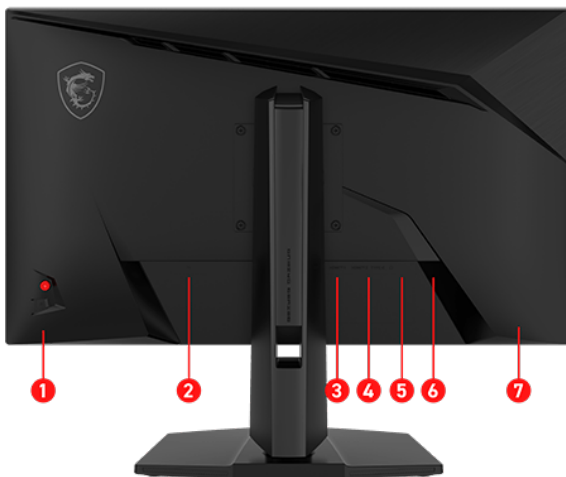

1. 5-way Joystick Navigator
2. AC-in
3. Display Port 1.4a(HBR3)
4. 2 x HDMI™ 2.0b (WQHD@144Hz)
5. Type-C (DP alt.) w/ 15W PD
6. Headphone out
7. Kensington Lock

SPECIFICATION

Model	Part No	9S6-3CF69T-001
	Color	ID1/Black-Black
	Local Dimming	4 Zones
Display	Screen Size	27" (68.58 cm)
	Active Display Area (mm)	596.736(H) x 335.664(V)
	Curvature	Flat
	Panel Type	Rapid IPS
	Resolution	2560x1440 (WQHD)
	Pixel pitch (mm)	0.2331(H)x0.2331(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~200Hz
	HDR (High dynamic range)	VESA DisplayHDR 400
	SDR Brightness (nits)	300
	Contrast Ratio	1000:1
	DCR (Dynamic Contrast Ratio)	100000000:1
	Signal Frequency	72~300 KHz(H) /48~200 Hz(V)
	Refresh Rate	200HZ
	Response Time (GTG)	0.5ms (Min.)
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	TBD
	NTSC (CIE1931 area percentage/overlap)	TBD
	sRGB (CIE1976 area percentage/overlap)	TBD
	sRGB (CIE1931 area percentage/overlap)	TBD
	Adobe RGB (CIE1976 area percentage/overlap)	TBD
	Adobe RGB (CIE1931 area percentage/overlap)	TBD
	DCI-P3 (CIE1976 area percentage/overlap)	TBD
	DCI-P3 (CIE1931 area percentage/overlap)	TBD
	Rec.709 (CIE1976 area percentage/overlap)	TBD
	Rec.709 (CIE1931 area percentage/overlap)	TBD
	Rec.2020 (CIE1976 area percentage/overlap)	TBD
	Rec.2020 (CIE1931 area percentage/overlap)	TBD
	Surface Treatment	Anti-glare
	Display Colors	1.07B
	Color bit	10 bits (8 bits + FRC)
	I/O Ports	USB Type C (DisplayPort Alternate)
Headphone-out		1
Lock type		Kensington Lock
HDMI		2
HDMI version		2.0b
HDMI HDCP version		2.3
DisplayPort		1
DisplayPort version		1.4a (HBR3)
DisplayPort HDCP version		2.3
Warranty	Warranty	36M
Power	Power Type	Internal Power Board
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	TBD
	Annual Energy Consumption (KWh)	TBD
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	TBD
Power Cord Type	C13	

Accessories	DisplayPort Cable	1
	HDMI Cable	0
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
Mouse Bungee Unit	0	
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 130 mm
	Adjustment (Pivot)	-90° ~ 90°
	VESA Mounting	100x100mm
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	TBD x TBD x TBD
	Product Dimension without Stand (WxDxH) (mm)	TBD x TBD x TBD
	Stand Dimension (WxDxH) (mm)	TBD x TBD x TBD
	Weight (Net kg)	TBD
	Weight Without Stand (kg)	TBD
Dimension & Weight (box)	Inside Carton Dimension (WxDxH) (cm)	84 x 14.8 x 47.5
	Outer Carton Dimension (WxDxH) (cm)	85.5 x 16.3 x 49.8
	Weight (Gross kg)	TBD
Barcode Info	EAN	4711377368131