

# XPS 13

DX13260

## Setup and Specifications

## Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

|                                                         |           |
|---------------------------------------------------------|-----------|
| <b>Chapter 1: Get to know your computer.....</b>        | <b>4</b>  |
| <b>Chapter 2: Get started with your computer.....</b>   | <b>9</b>  |
| <b>Chapter 3: Use the precision touchpad.....</b>       | <b>12</b> |
| <b>Chapter 4: Use the touchscreen display.....</b>      | <b>15</b> |
| <b>Chapter 5: Use keyboard shortcuts.....</b>           | <b>17</b> |
| <b>Chapter 6: Connect external displays.....</b>        | <b>19</b> |
| Turn off the internal display.....                      | 20        |
| <b>Chapter 7: Specifications of XPS 13 DX13260.....</b> | <b>21</b> |
| Processor.....                                          | 21        |
| Chipset.....                                            | 21        |
| Memory.....                                             | 22        |
| Storage.....                                            | 23        |
| GPU—Integrated.....                                     | 23        |
| Wireless module.....                                    | 23        |
| Internal slots.....                                     | 24        |
| External ports and slots.....                           | 24        |
| Display.....                                            | 25        |
| Dell low blue light display.....                        | 26        |
| Keyboard.....                                           | 26        |
| Touchpad.....                                           | 27        |
| Camera.....                                             | 27        |
| Audio.....                                              | 28        |
| Operating system.....                                   | 28        |
| Power adapter.....                                      | 28        |
| Power adapter requirements.....                         | 29        |
| Battery.....                                            | 30        |
| Power requirements.....                                 | 31        |
| Dimensions and weight.....                              | 31        |
| Operating and storage environment.....                  | 31        |
| Aesthetics and build.....                               | 32        |
| Dell support policy.....                                | 33        |
| <b>Chapter 8: Getting help and contacting Dell.....</b> | <b>34</b> |
| <b>Chapter 9: Revision history.....</b>                 | <b>35</b> |

# Get to know your computer

The following views provide an overview of the ports, connectors, and other components available on your computer. For detailed information about each component, see the specifications for your computer.

## Left view



Figure 1. Left view of computer

### For computers shipped with Intel Core processor:

1. **USB 3.2 Gen 2 (10 Gbps) Type-C port:** Provides data transfer speeds of up to 10 Gbps and supports DisplayPort 2.1 and USB PowerDelivery 3.1. It also supports USB-C cable locks.

### For computers shipped with Intel Core Ultra processor:

1. **Thunderbolt 4 (40 Gbps) USB-C port:** Provides data transfer speeds of up to 40 Gbps and supports USB4 1.0, DisplayPort 2.1, and USB PowerDelivery 3.1. Backward compatible with older USB standards. It also supports USB-C cable locks.

**NOTE:** Connect the power adapter to one of the USB-C ports.

**NOTE:** You can connect multiple devices, including external monitors, through a Dell Docking Station. For more information about Dell Docking Stations, search in the Knowledge Base Resource at the [Dell Support Site](#).

## Right view



Figure 2. Right view of computer

### For computers shipped with Intel Core processor:

1. **USB 3.2 Gen 2 (10 Gbps) Type-C port:** Provides data transfer speeds of up to 10 Gbps and supports DisplayPort 2.1 and USB PowerDelivery 3.1. It also supports USB-C cable locks.

### For computers shipped with Intel Core Ultra processor:

1. **Thunderbolt 4 (40 Gbps) USB-C port:** Provides data transfer speeds of up to 40 Gbps and supports USB4 1.0, DisplayPort 2.1, and USB PowerDelivery 3.1. Backward compatible with older USB standards. It also supports USB-C cable locks.

**NOTE:** Connect the power adapter to one of the USB-C ports.

**NOTE:** You can connect multiple devices, including external monitors, through a Dell Docking Station. For more information about Dell Docking Stations, search in the Knowledge Base Resource at the [Dell Support Site](#).

## Top view

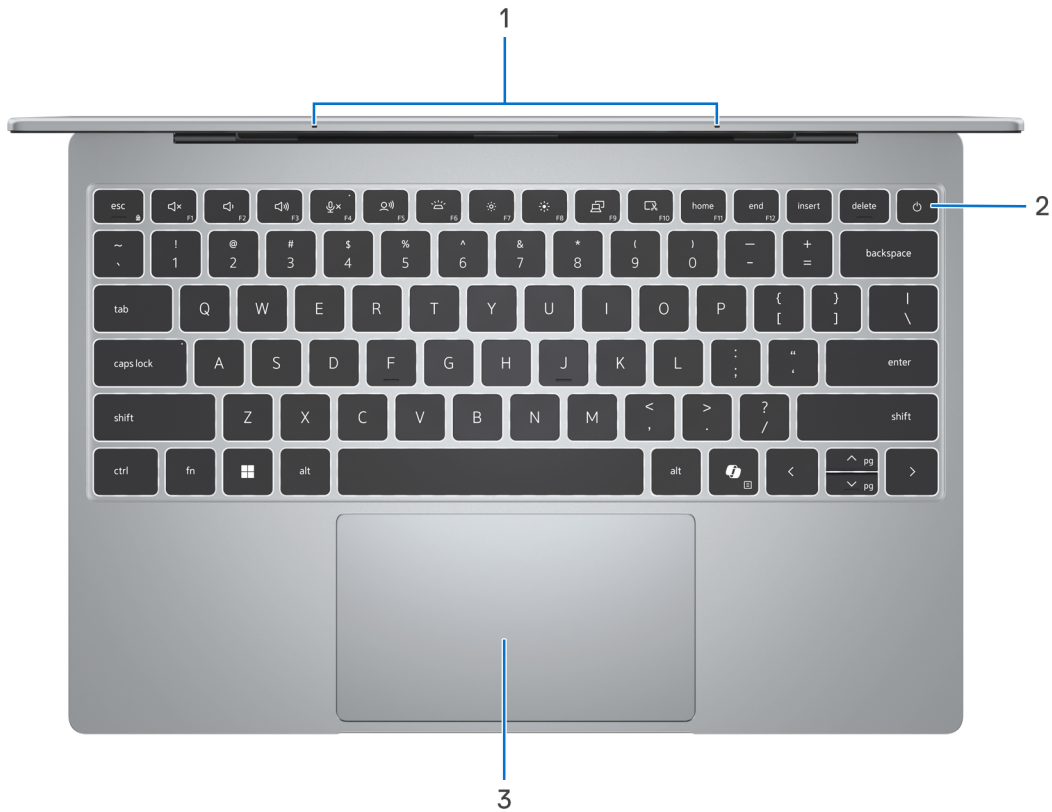


**Figure 3. Top view of computer**

1. **Dual-array microphones:** Provides digital sound input for audio recording, voice calls, and so on.

2. **Power button**

- Turn on the computer: Press the power button if the computer is off, sleeping, or hibernating.
- Put the computer to sleep: Press the power button while the computer is on.
- Force-shut down: Press and hold the power button for at least 10 seconds.

**NOTE:** Amber and white LEDs integrated into the power button function as battery-status lights as well as system-diagnostic lights.

3. **Multi-touch precision touchpad:** Multi-touch precision glass touchpad with gesture support.

## Front view



Figure 4. Front view of computer

1. **Infrared emitter:** Enables the infrared camera to sense and track motion.
2. **Infrared camera:** Uses facial recognition and enhances security when paired with Windows Hello face authentication.
3. **RGB camera:** Enables you to video chat, capture photos, and record videos.
4. **Camera-status light:** Turns on when the camera is in use.
5. **Ambient-light sensor:** Detects the ambient light and automatically adjusts the brightness of the display, keyboard, and capacitive touch function row.
6. **Infrared emitter:** Enables the infrared camera to sense and track motion.

## Bottom view

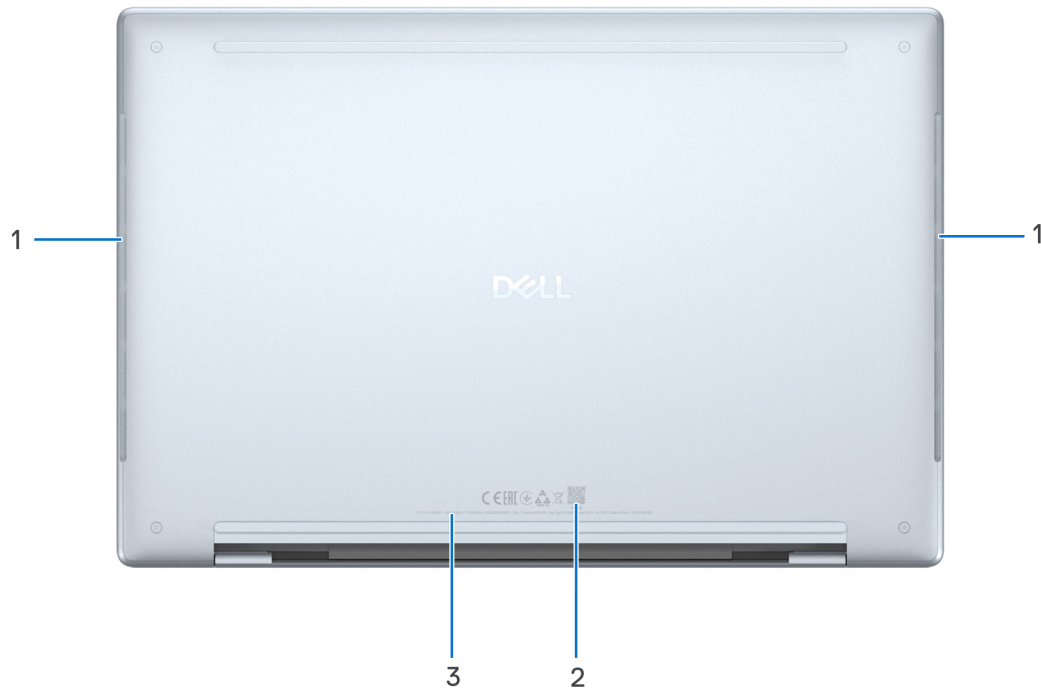


**Figure 5. Bottom view of computer**

1. **Speakers:** Provides audio output.
2. **MyDell QR code:** Scan to access MyDell, which is your hub for information that is personalized for your computer.
3. **Service Tag/Express Service Code:** The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information. The Express Service Code is a numeric version of the Service Tag.

## Service Tag/Express Service Code location



**Figure 6. Location of Service Tag/Express Service Code**

The Service Tag is a unique alphanumeric identifier that allows Dell service technicians to identify the hardware components in your computer and access warranty information. The Express Service Code is a numeric version of the Service Tag.

## Get started with your computer

Get started with your computer by connecting it to a power source, completing the operating system setup and accessing Dell apps.

### Turn on your computer

Assemble the power adapter and connect it to a power source before connecting it to one of the USB-C ports on the computer. Press the power button to turn on the computer.

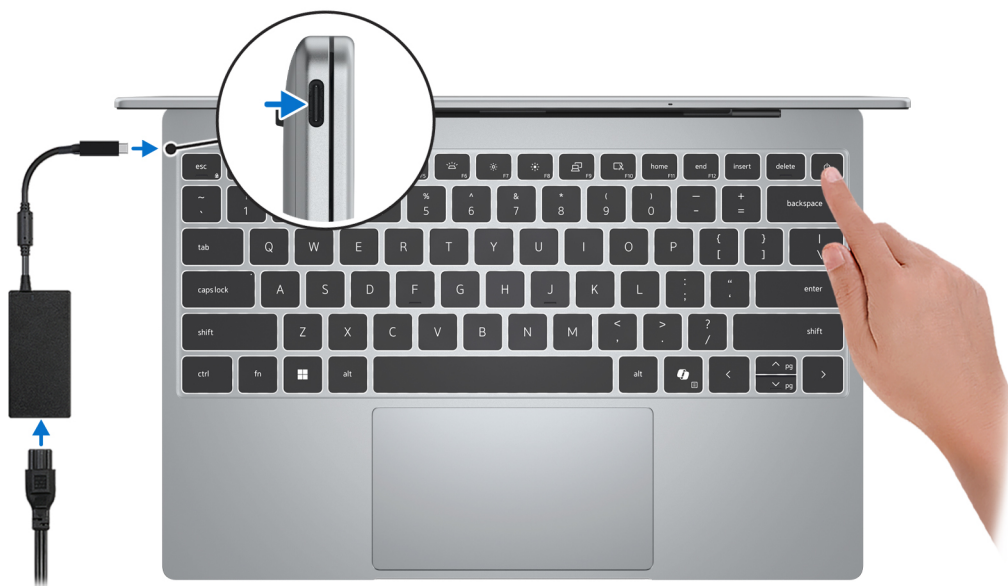


**Figure 7. Connect the power adapter to the computer and power source, then press the power button to turn it on.**


### Set up the operating system

1. After you turn on your computer, the operating system welcome screen appears.
2. Select your regional settings, such as language and keyboard layout.
3. Connect to the Internet using Wi-Fi.
4. After connecting to the Internet, follow the on-screen instructions to complete the operating system setup.

### Use Dell apps

The following table lists Dell apps available on your computer.

**Table 1. Locate and use Dell apps installed on your computer**

| Dell app                                                                          | Description                                                                                                                                                                                                                                                                                                                                     |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <b>Dell Optimizer</b><br>Dell Optimizer is an AI-based software application that allows you to customize your computer settings for power and battery, and more. For more information about configuring and using this app, search for Dell Optimizer at the <a href="#">Dell Support Site</a> .                                                |
|  | <b>Dell SupportAssist</b><br>SupportAssist keeps your computer running at its best by optimizing settings, detecting issue, and removing viruses. It also notifies when updates are available for your computer. For more information about configuring and using this app, search for SupportAssist at the <a href="#">Dell Support Site</a> . |

## Battery-status light behavior

The following table describes how the battery-status light (integrated into the power button) behaves in different power states.

**Table 2. Battery-status light behavior**

| Power source                       | Battery-status light | Power state of computer | Battery-charge level |
|------------------------------------|----------------------|-------------------------|----------------------|
| Connected power adapter or battery | Off                  | Powered off (S5)        | Not applicable       |
|                                    | Solid-white          | Turned on (S0)          | 6 - 100%             |
|                                    | Solid-amber          | Turned on (S0)          | <= 5%                |

## Configuring battery-charge settings in the BIOS Setup menu

Battery-charge settings for your computer can be configured as shown below to suit your usage requirements in the BIOS Setup menu.

**NOTE:** In addition to battery-charge settings in the BIOS Setup menu, the **Dynamic Charge** feature in the Dell Optimizer app dynamically applies the best battery charging policy. When your device remains plugged in for extended periods, **Dynamic Charge** limits charging to 80% to help prevent battery wear and extend the overall lifespan. The **Dynamic Charge** feature is enabled by default in Dell Optimizer. For more information, search for the *Dell Optimizer User's Guide* at the [Dell Support Site](#).

Available battery-charge settings in the BIOS Setup menu:

- **ExpressCharge:** Enabled by default, ExpressCharge quickly charges the battery using Dell fast-charge technology. This setting is recommended for users who need the battery to recharge rapidly. When the computer is powered off, the battery typically charges to 80% within one hour and to 100% within two hours. If the computer is turned on, charging may take longer.
- **Adaptive:** Enables Microsoft Smart Charging, which helps extend battery lifespan by preventing the battery from charging to 100% continuously. When Smart Charging is active, the battery stops charging at around 80% to reduce long-term wear. Smart Charging automatically turns on or off depending on how you use your computer:
  - If your computer remains connected to the power adapter for more than 12 hours, Smart Charging activates, and the battery caps at 80% on the next charge.
  - If the battery drains below 50% while running on battery power, Smart Charging turns off, and the battery charges up to 100% on the next charge.
  - Smart Charging remains permanently on in **Primarily AC Use** mode, keeping the battery at around 80%.
- **Standard:** Fully charges the battery at a moderate rate. This setting provides a balance between charging speed and battery longevity. It is recommended for users who frequently switch between battery power and an external power source.
- **Primarily AC Use:** Extends battery life by lowering the charge threshold so that the battery does not charge to 100%. This setting is recommended for users who primarily operate the computer while plugged into external power.
- **Custom:** Allows you to manually define the battery start and stop charge thresholds.

# Changing battery-charge settings in BIOS Setup menu

1. Restart your computer and press F2 immediately to enter **BIOS Setup**.
2. On the menu bar, select **Advanced**.
3. Select one of the following values for the **Battery Charge Configuration** option:
  - **Adaptive**
  - **Standard**
  - **ExpressCharge** (Default)
  - **Primarily AC Use**
  - **Custom**
4. Save the changes and exit the BIOS Setup program.

 **NOTE:** For more information about the BIOS Setup menu, see your computer's Service Manual available at the [Dell Support Site](#).

## Use the precision touchpad

The precision touchpad on your computer enables cursor movement and item selection without an external mouse. The following image indicates the active areas of the precision touchpad on your computer:

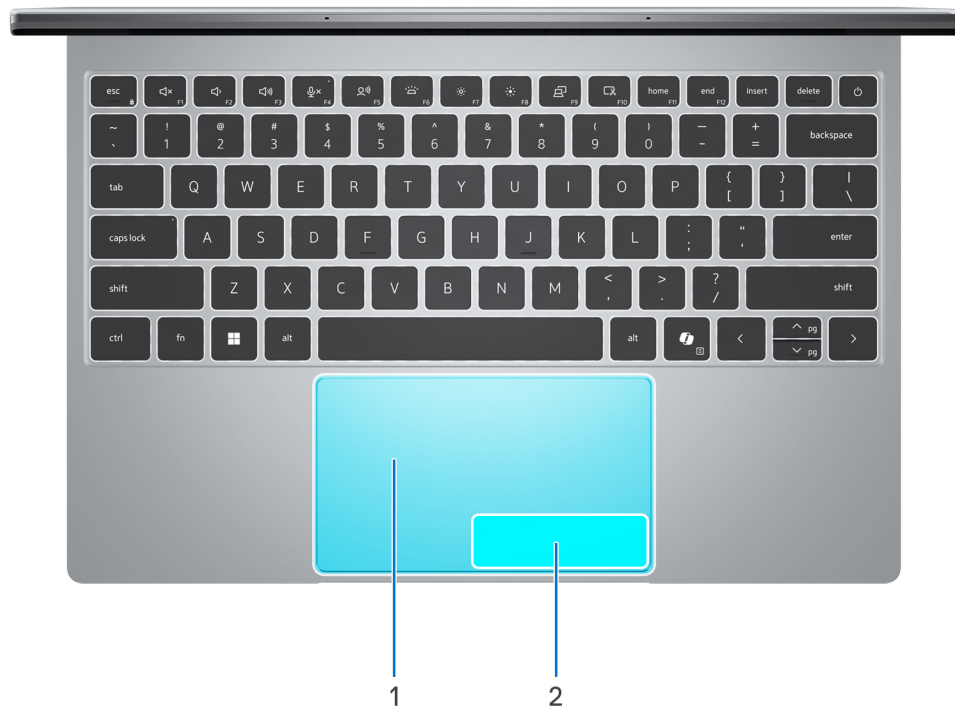


**Figure 8. Active areas of the precision touchpad**

### 1. Left-click area of the precision touchpad

Move your finger on the touchpad within this area to control the cursor. Tap this area to left-click.

### 2. Right-click area of the precision touchpad

Move your finger on the touchpad within this area to control the cursor. Tap this area to right-click.

The following table lists commonly used touchpad gestures. To enable or disable these gestures or to change touchpad sensitivity, haptic feedback and other touchpad settings, search for **Touchpad settings** in Windows.

**Table 3. Commonly used touchpad gestures in Windows**







| Touchpad gesture                                                                                                             | Description                                                                                                                                                      |
|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>Figure 9. Two-finger scroll</p>         | <p>Swipe two fingers on the touchpad to scroll vertically or horizontally through pages, documents, or lists. The touchpad also supports diagonal scrolling.</p> |
|  <p>Figure 10. Vertical auto-scroll</p>    | <p>Swipe two fingers up or down on the touchpad at a fast pace to start vertical auto-scroll. Tap the touchpad to stop auto-scroll.</p>                          |
|  <p>Figure 11. Horizontal auto-scroll</p> | <p>Swipe two fingers that are left or right on the touchpad at a fast pace to start horizontal auto-scroll. Tap the touchpad to stop auto-scroll.</p>            |
|  <p>Figure 12. Zoom in</p>                | <p>Place two fingers on the touchpad and then move them apart to zoom in.</p>                                                                                    |

**Table 3. Commonly used touchpad gestures in Windows (continued)**

| Touchpad gesture                                                                                                                                            | Description                                                                                                                                                                                                                          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p data-bbox="105 622 344 651">Figure 13. Zoom out</p>                    | <p data-bbox="805 275 1487 331">Place two fingers on the touchpad and then bring them closer to zoom-out.</p>                                                                                                                        |
|  <p data-bbox="105 1059 552 1088">Figure 14. Switch between open apps</p> | <p data-bbox="805 712 1382 768">Swipe three fingers quickly to the left or right on the touchpad to switch between open applications.</p>                                                                                            |
|  <p data-bbox="105 1496 523 1525">Figure 15. Launch Windows Search</p>   | <p data-bbox="805 1149 1487 1178">Tap three fingers on the touchpad to launch Windows Search.</p> <p data-bbox="805 1193 1487 1256"><b>NOTE:</b> Use <b>touchpad settings</b> in Windows to customize the application to launch.</p> |

For more information about the touchpad gestures available in Windows, search [Microsoft Support Site](#).

## Use the touchscreen display

Your XPS 13 DX13260 has a touchscreen display. You can touch the screen to interact with items instead of using a mouse.

The following table lists commonly used touchscreen gestures. Some gestures are application-specific and may not work in all applications.

**Table 4. List of commonly used touchscreen gestures**




| Touchscreen gesture                                                                                                     | Description                                                                                                        |
|-------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
|  <p>Figure 16. Zoom in</p>             | Place two fingers on the touchscreen and then move them apart to zoom in.                                          |
|  <p>Figure 17. Zoom out</p>          | Place two fingers on the touchscreen and then bring them closer to zoom out.                                       |
|  <p>Figure 18. Open context menu</p> | To open the context menu, touch and hold the item on the screen, similar to performing a right-click with a mouse. |

Table 4. List of commonly used touchscreen gestures (continued)

| Touchscreen gesture                                                                                           | Description                                                                                                       |
|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| <br><b>Figure 19. Scroll</b> | Swipe a finger on the touchscreen to scroll vertically or horizontally through an active page, document, or list. |

For more information about the touchscreen gestures available in Windows, search [Microsoft Support Site](#).

# Use keyboard shortcuts

**NOTE:** Keyboard characters may differ depending on the keyboard language configuration of your computer. Keys that are used for shortcuts remain the same across all language configurations.

## Standard shortcut keys

Some keys on your keyboard have two symbols on them. These keys can be used to type alternative characters or to perform secondary functions. The symbol that is shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press **shift** and the key, the symbol that is shown on the upper part of the key is typed out. For example, if you press **2**, **2** is typed out; if you press **Shift + 2**, **@** is typed out.

## Keys on the function-key row

The top row of the keyboard contains function keys. Pressing the **fn** key toggles between the standard function keys (**F1-F12**) and keys for media control.

**NOTE:** Pressing the **fn** and **esc** keys together locks the mode of the function-key row. When the computer restarts, the default mode of the function-key row is what was set before the computer was restarted.

**Table 5. Media keys available on the function-key row**

| Media key                                                                           | Description                                                                                                              |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
|  | Escape key                                                                                                               |
|  | Mute or unmute audio                                                                                                     |
|  | Decrease volume                                                                                                          |
|  | Increase volume                                                                                                          |
|  | Mute or unmute microphone<br><b>NOTE:</b> A light appears next to the microphone mute icon when the microphone is muted. |
|  | Converts speech to text                                                                                                  |
|  | Adjust keyboard backlight brightness                                                                                     |
|  | Decrease brightness of display                                                                                           |
|  | Increase brightness of display                                                                                           |
|  | Project to an external display                                                                                           |
|  | Takes a screen capture                                                                                                   |

Table 5. Media keys available on the function-key row (continued)

| Media key                                                                         | Description |
|-----------------------------------------------------------------------------------|-------------|
|  | Home key    |
|  | End key     |

## Other keyboard shortcuts

Table 6. Dedicated keys to launch specific features

| Keys                                                                              | Description                                                                                                                                                                                                                                                              |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | Launch the Windows Start menu                                                                                                                                                                                                                                            |
|  | Launch Copilot in Windows.<br><b>NOTE:</b> If Copilot in Windows is not available on your computer, the Copilot key launches Windows Search. For more information about Copilot in Windows, search in the Knowledge Base Resource at <a href="#">Dell Support Site</a> . |

The **fn** key is also used with selected keys on the keyboard to invoke other secondary functions.

Table 7. List of keyboard shortcuts invoked with **fn** key

| Keyboard shortcut      | Description   |
|------------------------|---------------|
| <b>fn + Up arrow</b>   | Page up       |
| <b>fn + Down arrow</b> | Page down     |
| <b>fn + Copilot</b>    | Shortcut menu |

## Connect external displays

Provides an overview of the external displays that can be connected to the computer.

Depending on the processor shipped with your computer and the connectors available on your external display, you can connect the display to the USB-C ports on your computer using:

- Daisy-chaining technique
- USB-C cables, adapters, or docking stations
- Thunderbolt cables, adapters, or docking stations

**NOTE:**

- To experience the full resolution supported by your external displays, use appropriate cables. For example, use DisplayPort cables for 4K and above resolution.
- Thunderbolt 4 ports, cables, adapters, or docking stations are applicable only to computers shipped with Intel Core Ultra processor.

The following table summarizes the number of external displays that can be connected to your computer.

**Table 8. External display support**

| Graphics card  | Supported external displays with laptop display enabled                                                                                                                                               | Supported external displays with laptop display disabled                                                                                                                                              |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Integrated GPU | <ul style="list-style-type: none"><li>• 2 external displays (Computers shipped with Intel Core processor)</li><li>• 3 external displays (Computers shipped with Intel Core Ultra processor)</li></ul> | <ul style="list-style-type: none"><li>• 3 external displays (Computers shipped with Intel Core processor)</li><li>• 4 external displays (Computers shipped with Intel Core Ultra processor)</li></ul> |

The external display connection method is shown in the following image.

- NOTE:** When connecting a display indirectly using an adapter or docking station, it is recommended that you connect the display to the docking station first, and then connect the docking station to the USB-C port on your computer.

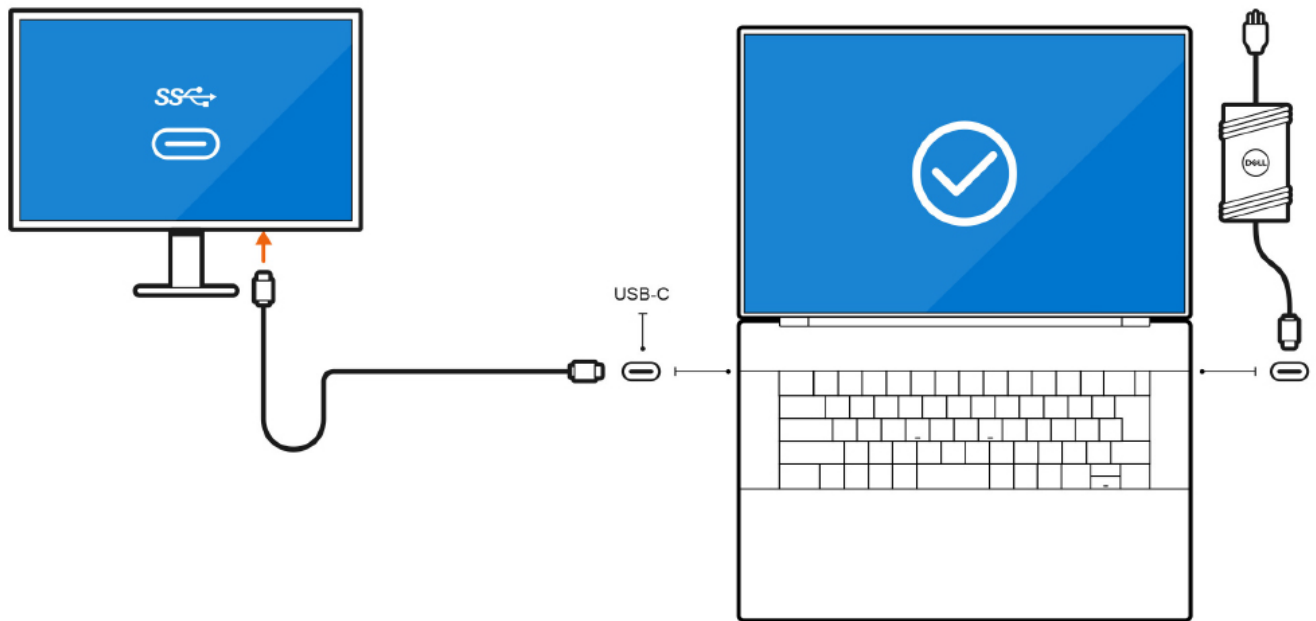


**Figure 20. Connecting to external displays**

## Turn off the internal display

There can be instances where you want to turn off the computer internal display to connect more external displays.

You can turn off the display of your computer by using the Display settings in Windows.

For more information about the steps to turn off the display, search [Microsoft Support Site](https://support.microsoft.com/).

# Specifications of XPS 13 DX13260

## Processor

The following table lists the details of the processors that are supported on your XPS 13 DX13260.

**Table 9. Processor**

| Description                                                                                                                                                                                                                                           | Option one                                                                                                         | Option two                                                                                                         | Option three                                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| Type                                                                                                                                                                                                                                                  | Intel Core 5 320                                                                                                   | Intel Core Ultra 5 325                                                                                             | Intel Core Ultra 7 355                                                                                             |
| Wattage                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>15 W base power consumption</li> <li>35 W at maximum turbo power</li> </ul> | <ul style="list-style-type: none"> <li>15 W base power consumption</li> <li>35 W at maximum turbo power</li> </ul> | <ul style="list-style-type: none"> <li>15 W base power consumption</li> <li>35 W at maximum turbo power</li> </ul> |
| Total cores                                                                                                                                                                                                                                           | 6                                                                                                                  | 8                                                                                                                  | 8                                                                                                                  |
| Number of Performance-cores                                                                                                                                                                                                                           | 2                                                                                                                  | 4                                                                                                                  | 4                                                                                                                  |
| Number of Efficient-cores                                                                                                                                                                                                                             | 4 low-power efficiency cores                                                                                       | 4 low-power efficiency cores                                                                                       | 4 low-power efficiency cores                                                                                       |
| Total threads                                                                                                                                                                                                                                         | 6                                                                                                                  | 8                                                                                                                  | 8                                                                                                                  |
| Speed                                                                                                                                                                                                                                                 | Up to 4.60 GHz                                                                                                     | Up to 4.50 GHz                                                                                                     | Up to 4.70 GHz                                                                                                     |
| Performance-core frequency                                                                                                                                                                                                                            |                                                                                                                    |                                                                                                                    |                                                                                                                    |
| Base frequency                                                                                                                                                                                                                                        | 1.50 GHz                                                                                                           | 2.10 GHz                                                                                                           | 2.30 GHz                                                                                                           |
| Maximum turbo frequency                                                                                                                                                                                                                               | 4.60 GHz                                                                                                           | 4.50 GHz                                                                                                           | 4.70 GHz                                                                                                           |
| Efficient-core frequency                                                                                                                                                                                                                              |                                                                                                                    |                                                                                                                    |                                                                                                                    |
| Base frequency                                                                                                                                                                                                                                        | 1.40 GHz                                                                                                           | 1.60 GHz                                                                                                           | 1.70 GHz                                                                                                           |
| Maximum turbo frequency                                                                                                                                                                                                                               | 3.40 GHz                                                                                                           | 3.40 GHz                                                                                                           | 3.50 GHz                                                                                                           |
| Cache                                                                                                                                                                                                                                                 | 6 MB                                                                                                               | 12 MB                                                                                                              | 12 MB                                                                                                              |
| Integrated graphics                                                                                                                                                                                                                                   | Intel Graphics                                                                                                     | Intel Graphics                                                                                                     | Intel Graphics                                                                                                     |
| Neural Processing Units (NPUs)                                                                                                                                                                                                                        | One NPU, supporting up to 16 TOPs                                                                                  | One NPU, supporting up to 47 TOPs                                                                                  | One NPU, supporting up to 49 TOPs                                                                                  |
|  <b>NOTE:</b> Tera Operations Per Second (TOPS) is an AI performance metric that measures how many trillions of operations per second an AI processor can perform. |                                                                                                                    |                                                                                                                    |                                                                                                                    |

## Chipset

The following table lists the details of the chipset that is supported on your XPS 13 DX13260.

**Table 10. Chipset**

| Description | Values                      |
|-------------|-----------------------------|
| Chipset     | Integrated in the processor |

**Table 10. Chipset (continued)**

| Description    | Values                                                                                                                                                                      |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Processor      | <ul style="list-style-type: none"> <li>Intel Core 5 320</li> <li>Intel Core Ultra 5 325</li> <li>Intel Core Ultra 7 355</li> </ul>                                          |
| DRAM bus width | <ul style="list-style-type: none"> <li>64 bit (Computers shipped with Intel Core processor)</li> <li>128 bit (Computers shipped with Intel Core Ultra processor)</li> </ul> |
| Flash EPROM    | Not applicable<br> <b>NOTE:</b> Integrated Flash EPROM not present in CPU                  |
| PCIe bus       | PCIe 4.0                                                                                                                                                                    |

## Memory

The following table lists the memory specifications that are supported by your XPS 13 DX13260.

**Table 11. Memory specifications**

| Description                     | Values                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Memory slots                    | <ul style="list-style-type: none"> <li>Single-channel on-board memory (Computers shipped with Intel Core processor)</li> <li>Dual-channel on-board memory (Computers shipped with Intel Core Ultra processor)</li> </ul>  <b>NOTE:</b> The memory is integrated on the system board and is not upgradeable. |
| Memory type                     | LPDDR5X                                                                                                                                                                                                                                                                                                                                                                                        |
| Memory speed                    | 7467 MT/s                                                                                                                                                                                                                                                                                                                                                                                      |
| Maximum memory configuration    | <ul style="list-style-type: none"> <li>16 GB (Computers shipped with Intel Core processor)</li> <li>64 GB (Computers shipped with Intel Core Ultra processor)</li> </ul>                                                                                                                                                                                                                       |
| Minimum memory configuration    | <ul style="list-style-type: none"> <li>8 GB (Computers shipped with Intel Core processor)</li> <li>16 GB (Computers shipped with Intel Core Ultra processor)</li> </ul>                                                                                                                                                                                                                        |
| Memory size                     | For computers shipped with Intel Core processor: <ul style="list-style-type: none"> <li>8 GB</li> <li>16 GB</li> </ul> For computers shipped with Intel Core Ultra processor: <ul style="list-style-type: none"> <li>16 GB</li> <li>32 GB</li> <li>64 GB</li> </ul>                                                                                                                            |
| Memory configurations supported | For computers shipped with Intel Core processor: <ul style="list-style-type: none"> <li>8 GB LPDDR5X at 7467 MT/s</li> <li>16 GB LPDDR5X at 7467 MT/s</li> </ul> For computers shipped with Intel Core Ultra processor: <ul style="list-style-type: none"> <li>16 GB LPDDR5X at 7467 MT/s</li> <li>32 GB LPDDR5X at 7467 MT/s</li> </ul>                                                       |

Table 11. Memory specifications (continued)

| Description | Values                                                                     |
|-------------|----------------------------------------------------------------------------|
|             | <ul style="list-style-type: none"><li>64 GB LPDDR5X at 7467 MT/s</li></ul> |

## Storage

This section lists the storage options on your XPS 13 DX13260.  
Your XPS 13 DX13260 supports one M.2 2230 solid-state drive.

Table 12. Storage specifications

| Storage type               | Interface type     | Capacity                                                                    |
|----------------------------|--------------------|-----------------------------------------------------------------------------|
| M.2 2230 solid-state drive | Gen 4 x4 PCIe NVMe | 256 GB (Available only for computers shipped with Intel Core processor)     |
|                            |                    | 512 GB                                                                      |
|                            |                    | 1 TB (Available only for computers shipped with Intel Core Ultra processor) |

## GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your XPS 13 DX13260.

Table 13. GPU—Integrated

| Controller     | Memory size          | Processor                                                                                                                      |
|----------------|----------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Intel Graphics | Shared system memory | <ul style="list-style-type: none"><li>Intel Core 5 320</li><li>Intel Core Ultra 5 325</li><li>Intel Core Ultra 7 355</li></ul> |

## Wireless module

The following table lists the Wireless Local Area Network (WLAN) module that is supported on your XPS 13 DX13260.

Table 14. Wireless module specifications

| Description               | Values                                                                                                                                                                                                |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model number              | <ul style="list-style-type: none"><li>Intel Wi-Fi 7 (BE213) (Computers shipped with Intel Core processor)</li><li>Intel Wi-Fi 7 (BE211) (Computers shipped with Intel Core Ultra processor)</li></ul> |
| Transfer rate             | <ul style="list-style-type: none"><li>Up to 2800 Mbps (Computers shipped with Intel Core processor)</li><li>Up to 5800 Mbps (Computers shipped with Intel Core Ultra processor)</li></ul>             |
| Frequency bands supported | 2.4 GHz/5 GHz/6 GHz                                                                                                                                                                                   |
| Wireless standards        | <ul style="list-style-type: none"><li>WiFi 802.11a/b/g</li></ul>                                                                                                                                      |

**Table 14. Wireless module specifications (continued)**

| Description                                                                                                                                                                                                        | Values                                                                                                                                                                                              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                    | <ul style="list-style-type: none"> <li>• Wi-Fi 4 (WiFi 802.11n)</li> <li>• Wi-Fi 5 (WiFi 802.11ac)</li> <li>• Wi-Fi 6/6E (WiFi 802.11ax)</li> <li>• Wi-Fi 7 (WiFi 802.11be)</li> </ul>              |
| Encryption                                                                                                                                                                                                         | <ul style="list-style-type: none"> <li>• 802.1X</li> <li>• SAE</li> <li>• GCMP-256</li> <li>• AES-CCMP</li> <li>• WPA2-Personal/WPA2-Enterprise</li> <li>• WPA3-Personal/WPA3-Enterprise</li> </ul> |
| Bluetooth wireless card<br> <b>NOTE:</b> The functionality of the Bluetooth wireless card may vary based on the operating system. | Bluetooth 6.0                                                                                                                                                                                       |

## Internal slots

The following table lists the internal slots of your XPS 13 DX13260.

**Table 15. Internal slots**

| Description | Values                                                                                                                                                                                                                                                                 |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| M.2         | <p>One M.2 slot for M.2 2230 solid-state drive</p> <p> <b>NOTE:</b> To learn more about the features of different types of M.2 cards, search <a href="#">Dell Support Site</a>.</p> |

## External ports and slots

The following table lists the external ports and slots on your XPS 13 DX13260.

**Table 16. External ports and slots**

| Description   | Values                                                                                                                                                                                                                                                                                                                                 |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| USB ports     | <ul style="list-style-type: none"> <li>• Two USB 3.2 Gen 2 ports with support for DisplayPort 2.1 and Power Delivery 3.1 (Computers shipped with Intel Core processor)</li> <li>• Two Thunderbolt 4 USB-C ports with support for DisplayPort 2.1 and Power Delivery 3.1 (Computers shipped with Intel Core Ultra processor)</li> </ul> |
| Audio port    | <ul style="list-style-type: none"> <li>• Two USB 3.2 Gen 2 ports with support for DisplayPort 2.1 and Power Delivery 3.1 (Computers shipped with Intel Core processor)</li> <li>• Two Thunderbolt 4 USB-C ports with support for DisplayPort 2.1 and Power Delivery 3.1 (Computers shipped with Intel Core Ultra processor)</li> </ul> |
| Video port(s) | <ul style="list-style-type: none"> <li>• Two USB 3.2 Gen 2 ports with support for DisplayPort 2.1 and Power Delivery 3.1 (Computers shipped with Intel Core processor)</li> </ul>                                                                                                                                                      |

**Table 16. External ports and slots (continued)**

| Description         | Values                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                     | <ul style="list-style-type: none"><li>Two Thunderbolt 4 USB-C ports with support for DisplayPort 2.1 and Power Delivery 3.1 (Computers shipped with Intel Core Ultra processor)</li></ul> <p> <b>NOTE:</b> A USB-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.</p> |
| Media-card reader   | None                                                                                                                                                                                                                                                                                                                                                                                          |
| Power-adapter port  | DC-IN through one of the two USB-C ports                                                                                                                                                                                                                                                                                                                                                      |
| Security-cable slot | Supported through USB-C ports                                                                                                                                                                                                                                                                                                                                                                 |

## Display

The following table lists the display specifications of your XPS 13 DX13260.

**Table 17. Display specifications**

| Description                             | Values                                       |
|-----------------------------------------|----------------------------------------------|
| Display type                            | 34cm (13.4"), Touch, Eyesafe, Low blue light |
| Touch options                           | Yes                                          |
| Display-panel technology                | White Light Emitting Diode (WLED)            |
| Display-panel dimensions (active area): |                                              |
| Height                                  | 288 mm (11.34 in.)                           |
| Width                                   | 180 mm (7.09 in.)                            |
| Diagonal                                | 339.60 mm (13.37 in.)                        |
| Display-panel native resolution         | 2560 x 1600                                  |
| Luminance (typical)                     | 500 nits                                     |
| Megapixels                              | 2.3                                          |
| Color gamut                             | DCI-P3 100% Typical , 95% minimum            |
| Pixels Per Inch (PPI)                   | 225                                          |
| Contrast ratio (minimum)                | 1600:1                                       |
| Response time (maximum)                 | 35 ms                                        |
| Refresh rate                            | VRR 30 to 120Hz                              |
| Horizontal view angle (minimum)         | +/- 88 degrees                               |
| Vertical view angle (minimum)           | +/- 88 degrees                               |
| Pixel pitch                             | 0.1125 mm                                    |
| Power consumption (maximum)             | 4.17 W                                       |

**Table 17. Display specifications (continued)**

| Description                 | Values     |
|-----------------------------|------------|
| Anti-glare vs glossy finish | Anti-glare |

## Dell low blue light display

 **WARNING:** Prolonged exposure to blue light from the display may lead to long-term effects such as eye strain, eye fatigue, or damage to the eyes.

Blue light is a color in the light spectrum which has a short wavelength and high energy. Chronic exposure to blue light, particularly from digital sources may disrupt sleep patterns and cause long-term effects such as eye strain, eye fatigue, or damage to the eyes.

The display on this computer is designed to minimize blue light and complies with TÜV Rheinland's requirement for low blue light displays.

Low blue light mode is enabled at the factory, so no further configuration is necessary.

To reduce the risk of eye strain, it is also recommended that you:

- Position the display at a comfortable viewing distance between 20 and 28 inches (50 cm and 70 cm) from your eyes.
- Blink frequently to moisten your eyes, wet your eyes with water, or apply suitable eye drops.
- Look away from your display, and gaze at a distant object at 20 ft (609.60 cm) away for at least 20 seconds during each break.
- Take an extended break for 20 minutes every two hours.

## Keyboard

The following table lists the keyboard specifications of your XPS 13 DX13260.

**Table 18. Keyboard specifications**

| Description        | Values                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Keyboard type      | Backlit keyboard with Copilot key<br> <b>NOTE:</b> The top row of the keyboard can display standard Function buttons or media and display control buttons.                                                                                                                                                                                                                   |
| Keyboard layout    | QWERTY                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Number of keys     | <ul style="list-style-type: none"> <li>• 80 keys (Arabic, Canada Bilingual [MUI], Chinese Traditional, English International, English US, Hebrew, Korean)</li> <li>• 81 keys (Belgian, Czech &amp; Slovakian [MUI], English UK, French European, German, Italian, Nordic [MUI], Portuguese Iberian, Spanish Castilian, Spanish Latin America, Swiss European [MUI], Turkish)</li> <li>• 82 keys (Portuguese Brazilian)</li> <li>• 84 keys (Japanese)</li> </ul> |
| Key pitch          | Horizontal = 19.05 mm key pitch<br>Vertical = 18.05 mm key pitch                                                                                                                                                                                                                                                                                                                                                                                                |
| Keyboard shortcuts | <p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions.</p> <ul style="list-style-type: none"> <li>• To type the alternate character, press Shift and the desired key.</li> </ul>                                                                                                                                                                                        |

Table 18. Keyboard specifications (continued)

| Description | Values                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             | <ul style="list-style-type: none"><li>To perform secondary functions, press Fn and the desired key.</li></ul> <div><div></div><div><b>NOTE:</b> If Copilot in Windows is not available on your computer, pressing the Copilot key launches Windows search. For more information about Copilot in Windows, search <a href="#">Dell Support site</a>.</div></div> <p>For more information, see <a href="#">Use keyboard shortcuts</a>.</p> |

## Touchpad

The following table lists the touchpad specifications of your XPS 13 DX13260.

Table 19. Touchpad specifications

| Description            | Values              |
|------------------------|---------------------|
| Touchpad resolution:   | >300 DPI            |
| Touchpad dimensions:   |                     |
| <div></div> Horizontal | 118.5 mm (4.67 in.) |
| <div></div> Vertical   | 68.5 mm (2.70 in.)  |

## Camera

The following table lists the camera specifications of your XPS 13 DX13260.

Table 20. Camera specifications

| Description                 | Values                     |
|-----------------------------|----------------------------|
| Number of cameras           | Two                        |
| Camera type                 | FHD MIPI RGB and IR camera |
| Camera location             | Front (Top of bezel)       |
| Camera sensor type          | CMOS sensor technology     |
| Camera resolution:          |                            |
| Still image                 | 2 megapixels               |
| Video                       | 1920 x 1080 at 30 fps      |
| Infrared camera resolution: |                            |
| Video                       | 360 x 360 at 15 fps        |
| Diagonal viewing angle:     |                            |
| Camera                      | 93.9 degrees               |
| Infrared camera             | 82.7 degrees               |

# Audio

The following table lists the audio specifications of your XPS 13 DX13260.

**Table 21. Audio specifications**

| Description                | Values                                                                                                                                                                                                                                                                                                                          |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Audio controller           | Cirrus Logic CS42L43                                                                                                                                                                                                                                                                                                            |
| Stereo conversion          | Waves MaxxAudio 13                                                                                                                                                                                                                                                                                                              |
| Internal audio interface   | SoundWire interface                                                                                                                                                                                                                                                                                                             |
| External audio interface   | <ul style="list-style-type: none"><li>Two USB 3.2 Gen 2 ports with support for DisplayPort 2.1 and Power Delivery 3.1 (Computers shipped with Intel Core processor)</li><li>Two Thunderbolt 4 USB-C ports with support for DisplayPort 2.1 and Power Delivery 3.1 (Computers shipped with Intel Core Ultra processor)</li></ul> |
| Number of speakers         | <ul style="list-style-type: none"><li>Woofers (two channels)</li><li>Tweeters (two channels)</li></ul>                                                                                                                                                                                                                          |
| Internal-speaker amplifier | Cirrus Logic SmartAmp                                                                                                                                                                                                                                                                                                           |
| External volume controls   | Media control keys on function-key row                                                                                                                                                                                                                                                                                          |
| Speaker output:            |                                                                                                                                                                                                                                                                                                                                 |
| Average                    | 10 W total: <ul style="list-style-type: none"><li>3 W woofers x 2 channels</li><li>2 W tweeter x 2 channels</li></ul>                                                                                                                                                                                                           |
| Peak                       | 10 W total: <ul style="list-style-type: none"><li>3 W woofers x 2 channels</li><li>2 W tweeter x 2 channels</li></ul>                                                                                                                                                                                                           |
| Microphone                 | Dual digital-array microphones                                                                                                                                                                                                                                                                                                  |

## Operating system

Your XPS 13 DX13260 supports the following operating systems:

- Windows 11 Home
- Windows 11 Professional

## Power adapter

The following table lists the power adapter specifications of your XPS 13 DX13260.

**Table 22. Power-adapter specifications**

| Description               | Option one                            | Option two                         |
|---------------------------|---------------------------------------|------------------------------------|
| Type                      | 65 W AC adapter, USB Type-C, AC Cable | 65 W AC adapter, USB Type-C, 2-pin |
| Power-adapter dimensions: |                                       |                                    |

**Table 22. Power-adapter specifications (continued)**

| Description                                                                                                                                                                                                                                                                          | Option one                                                                                                                                                                           | Option two                                                                                                                                                                           |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Height                                                                                                                                                                                                                                                                               | 31 mm (1.22 in.)                                                                                                                                                                     | 31 mm (1.22 in.)                                                                                                                                                                     |
| Width                                                                                                                                                                                                                                                                                | 41 mm (1.61 in.)                                                                                                                                                                     | 41.5 mm (1.63 in.)                                                                                                                                                                   |
| Depth                                                                                                                                                                                                                                                                                | 63 mm (2.48 in.)                                                                                                                                                                     | 48.5 mm (1.91 in.)                                                                                                                                                                   |
| Input voltage                                                                                                                                                                                                                                                                        | 100 VAC–240 VAC                                                                                                                                                                      | 100 VAC - 240 VAC                                                                                                                                                                    |
| Input frequency                                                                                                                                                                                                                                                                      | 50 Hz–60 Hz                                                                                                                                                                          | 50 Hz–60 Hz                                                                                                                                                                          |
| Input current (maximum)                                                                                                                                                                                                                                                              | 1.70 A                                                                                                                                                                               | 1.70 A                                                                                                                                                                               |
| Output current (continuous)                                                                                                                                                                                                                                                          | Operating:<br><ul style="list-style-type: none"> <li>20 V/3.25 A (Continuous)</li> <li>15 V/3 A (Continuous)</li> <li>9 V/ 3 A (Continuous)</li> <li>5 V/3 A (Continuous)</li> </ul> | Operating:<br><ul style="list-style-type: none"> <li>20 V/3.25 A (Continuous)</li> <li>15 V/3 A (Continuous)</li> <li>9 V/ 3 A (Continuous)</li> <li>5 V/3 A (Continuous)</li> </ul> |
| Rated output voltage                                                                                                                                                                                                                                                                 | <ul style="list-style-type: none"> <li>20 VDC</li> <li>15 VDC</li> <li>9 VDC</li> <li>5 VDC</li> </ul>                                                                               | <ul style="list-style-type: none"> <li>20 VDC</li> <li>15 VDC</li> <li>9 VDC</li> <li>5 VDC</li> </ul>                                                                               |
| Temperature range:                                                                                                                                                                                                                                                                   |                                                                                                                                                                                      |                                                                                                                                                                                      |
| Operating                                                                                                                                                                                                                                                                            | 0°C to 35°C (32°F to 95°F)                                                                                                                                                           | 0°C to 35°C (32°F to 95°F)                                                                                                                                                           |
| Storage                                                                                                                                                                                                                                                                              | -40°C to 70°C (-40°F to 158°F)                                                                                                                                                       | -40°C to 70°C (-40°F to 158°F)                                                                                                                                                       |
|  <b>CAUTION:</b> Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components. |                                                                                                                                                                                      |                                                                                                                                                                                      |

## Power adapter requirements

 **NOTE:** If you did not purchase the Dell-branded power adapter that is recommended for your computer, ensure that the power adapter you use meets the following requirements.

The following table lists the power adapter requirements for your XPS 13 DX13260.

**Table 23. Power adapter requirements**

| Description                                                                                                                                                                                                                                                                                                         | Value          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Power that is required from a power adapter to achieve optimal performance.                                                                                                                                                                                                                                         | 65 W           |
| Power that charges the computer at a slower speed.<br> <b>NOTE:</b> A warning message may appear informing you about the use of a lower-powered adapter and slower charging speed.                                               | Less than 55 W |
| Minimum power that is required from a power adapter to operate the computer and charge the battery.<br> <b>NOTE:</b> A warning message appears informing you about the use of a lower-powered adapter and slower charging speed. | 27 W           |
| USB Power Delivery (PD) fast charging                                                                                                                                                                                                                                                                               | Supported      |

**Table 23. Power adapter requirements (continued)**

| Description        | Value                                                                                                                                                                                                                            |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ExpressCharge mode | Supported<br> <b>NOTE:</b> Ensure that the computer with a 52 Wh battery is connected to a 65 W power adapter for this feature to be supported. |

## Battery

The following table lists the battery specifications of your XPS 13 DX13260.

**Table 24. Battery specifications**

| Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Values                                                                                                                                |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Battery type                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 3-cell lithium-ion polymer, 52 Wh, ExpressCharge                                                                                      |
| Battery voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 11.70 VDC                                                                                                                             |
| Battery weight (maximum)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 0.20 kg (0.44 lb)                                                                                                                     |
| Battery dimensions:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                       |
| Height                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 4.50 mm (0.18 in.)                                                                                                                    |
| Width                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 236 mm (9.29 in.)                                                                                                                     |
| Depth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 88 mm (3.46 in.)                                                                                                                      |
| Temperature range:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                       |
| Operating                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <ul style="list-style-type: none"> <li>Charge: 0°C to 50°C (32°F to 122°F)</li> <li>Discharge: 0°C to 60°C (32°F to 149°F)</li> </ul> |
| Storage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | -20°C to 65°C (-4°F to 149°F)                                                                                                         |
| Battery operating time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions                        |
| Battery charging time (approximate)<br> <b>NOTE:</b> You can control the charging time, duration, start and end time, and so on, using the settings on the Dell Optimizer application. For more information about Dell Optimizer application, search <a href="#">Dell Support Site</a> .                                                                                                                                                                                         | Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.                       |
| Coin-cell battery                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Not supported                                                                                                                         |
|  <b>CAUTION:</b> Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.                                                                                                                                                                                                                                                                                |                                                                                                                                       |
|  <b>CAUTION:</b> Dell Technologies recommends that you charge the battery regularly for optimal power consumption.                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                       |
|  <b>NOTE:</b> To help preserve battery health, the battery may enter Storage Mode after an extended period of inactivity (approximately three weeks or longer). If the charge level becomes critically low during storage, the battery may disable certain functions as a protective measure. Connect the AC adapter to power on the computer and recharge the battery. For more information about Storage Mode, see <a href="#">Battery Storage Mode at Dell Support Site</a> . |                                                                                                                                       |

# Power requirements

**NOTE:** The information in this section is applicable to the European Union (EU) countries.




Figure 21. Pictogram for power charging requirements

The power that is delivered by the charger must be between a minimum of 27 Watts that is required by the radio equipment, and a maximum of 65 Watts in order to achieve the maximum charging speed.

# Dimensions and weight

The following table lists the height, width, depth, and weight of your XPS 13 DX13260.

Table 25. Dimensions and weight

| Description                                                                                               | Values                |
|-----------------------------------------------------------------------------------------------------------|-----------------------|
| Front height                                                                                              | 12.75 mm (0.50 in.)   |
| Rear height                                                                                               | 12.75 mm (0.50 in.)   |
| Width                                                                                                     | 296.90 mm (11.69 in.) |
| Depth                                                                                                     | 200.70 mm (7.90 in.)  |
| Minimum Weight<br><b>NOTE:</b> The weight of your computer depends on the configuration that you ordered. | 1 kg (2.2 lb)         |

# Operating and storage environment

This table lists the operating and storage specifications of your XPS 13 DX13260.

**Airborne contaminant level:** G1 as defined by ISA-S71.04-1985

Table 26. Computer environment

| Description                 | Operating                   | Storage                        |
|-----------------------------|-----------------------------|--------------------------------|
| Temperature range           | 0°C to 35°C (32 °F to 95°F) | -40°C to 65°C (-40°F to 149°F) |
| Relative humidity (maximum) | 10% to 90% (non-condensing) | 5% to 95% (non-condensing)     |
| Vibration (maximum)*        | 0.66 GRMS                   | 1.30 GRMS                      |
| Shock (maximum)             | 140 G†                      | 160 G†                         |

Table 26. Computer environment (continued)

| Description                                                                                                                                                                                                                | Operating                                  | Storage                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|----------------------------------------------|
| Altitude range                                                                                                                                                                                                             | -15.2 m to 3048 m (-49.87 ft to 10,000 ft) | -15.2 m to 10,668 m (-49.87 ft to 35,000 ft) |
| <div><div></div><div>CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.</div></div> |                                            |                                              |

\* Measured using a random vibration spectrum that simulates the user environment.

† Measured using a 2 ms half-sine pulse.

## Aesthetics and build

This section details the Color, Material, and Finish (CMF) specifications of your computer.



Figure 22. CMF of XPS 13 DX13260 (Sky Dull BB)



**Figure 23. CMF of XPS 13 DX13260 (Storm Dull BB)**

**Table 27. CMF specifications**

| Component               | Option one                                                                                                            | Option two                                                                                                            |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| A Cover (Top)           | <ul style="list-style-type: none"> <li>Aluminum</li> <li>Sky Dull BB</li> <li>10+/-3 Gloss Units (GU)</li> </ul>      | <ul style="list-style-type: none"> <li>Aluminum</li> <li>Storm Dull BB</li> <li>10+/-3 Gloss Units (GU)</li> </ul>    |
| B Cover (Display bezel) | <ul style="list-style-type: none"> <li>SUS</li> <li>Dell Standard Black, Matte</li> <li>Matte 5.5+/-1.5 GU</li> </ul> | <ul style="list-style-type: none"> <li>SUS</li> <li>Dell Standard Black, Matte</li> <li>Matte 5.5+/-1.5 GU</li> </ul> |
| C Cover (Palmrest)      | <ul style="list-style-type: none"> <li>Aluminium</li> <li>Sky Dull BB</li> <li>10+/-3 Gloss Units (GU)</li> </ul>     | <ul style="list-style-type: none"> <li>Aluminum</li> <li>Storm Dull BB</li> <li>10+/-3 Gloss Units (GU)</li> </ul>    |
| D Cover (Bottom)        | <ul style="list-style-type: none"> <li>Aluminum</li> <li>Sky Dull BB</li> <li>10+/-3 GU</li> </ul>                    | <ul style="list-style-type: none"> <li>Aluminum</li> <li>Storm Dull BB</li> <li>10+/-3 Gloss Units (GU)</li> </ul>    |

## Dell support policy

For information about Dell support policy, search [Dell Support Site](#).

# Getting help and contacting Dell

## Self-help resources

You can get information and help on Dell products and services using these self-help resources:

**Table 28. Self-help resources**

| Self-help resources                                                                                                                  | Resource location                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Information about Dell products and services                                                                                         | <a href="#">Dell Site</a>                                                                                                                                                                                                                                                                                                                                                                  |
| Tips                                                                                                                                 |                                                                                                                                                                                                                                                                                                           |
| Contact Support                                                                                                                      | In Windows search, type <code>Contact Support</code> , and press Enter.                                                                                                                                                                                                                                                                                                                    |
| Online help for operating system                                                                                                     | <a href="#">Windows Support Site</a>                                                                                                                                                                                                                                                                                                                                                       |
| Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals, and documents. | <p>Your Dell computer is uniquely identified using a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at <a href="#">Dell Support Site</a>.</p> <p>For more information about how to find the Service Tag for your computer, see <a href="#">Locate the Service Tag on your computer</a>.</p> |
| Dell knowledge base articles                                                                                                         | <ol style="list-style-type: none"> <li>1. Go to <a href="#">Dell Support Site</a>.</li> <li>2. On the menu bar at the top of the Support page, select <b>Support &gt; Support Library</b>.</li> <li>3. In the Search field on the Support Library page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.</li> </ol>           |

## Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see [Dell Support Site](#).

 **NOTE:** Availability of the services may vary depending on the country or region, and product.

 **NOTE:** If you do not have an active Internet connection, you can find contact information in your purchase invoice, packing slip, bill, or Dell product catalog.

## Revision history

Tracks all updates that are made to the document. It typically includes the date of change, version number, and a brief description of the modification. This log helps maintain transparency, accountability, and a clear timeline of progress.

**Table 29. Revision history**

| Revision | Date           | Description                                                                |
|----------|----------------|----------------------------------------------------------------------------|
| A02      | September 2026 | Updated information about the keyboard shortcuts.                          |
| A01      | July 2026      | Added information about computers shipped with Intel Core Ultra processor. |
| A00      | June 2026      | Original publish date.                                                     |